

**Futurewood Corporation**

9676 N. Kruger Road  
 Hayward, WI 54843  
 Township: **Wilson**

Advertised species, products and value for sale tract#: **T015-22-1**

Contract Date: **11/14/22**

**SE S19-T35N-R5E; SW S20-T35N-R5E**

Approximate cutting area: **108** acres

Product Species			Estimated Unit Volume	Approved Bid Per Unit	Estimated Value
20-TA	Aspen Pulp	Tons	5,000.00	23.77	118,850.00
20-TMX	Mixed Hardwood Pulp	Tons	340.00	11.12	3,780.80
20-TF	Fir Pulp	Tons	150.00	5.07	760.50
			Total estimated value of accepted bid		<b>123,391.30</b>

**Cutting Instructions:****Contract Available for Inspection**

1) Clearcut area: cut all living trees greater than 1 inch in diameter except for white birch, elm, spruce, tamarack, pine, cherry, oak, butternut, cedar, hemlock, apple, and hawthorn. Do not cut residual cut non-merchantable trees in low wet areas and drainages. Pockets of non-merchantable fir that will not impede aspen regeneration may be left uncut with prior approval from the Lincoln County Forestry Department. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized.

2) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations.


3) Any roadwork will require prior approval from the Lincoln County Forestry Department and must follow BMP guidelines. Contractor is responsible for installing broad based dips, water bars and/or using other soil stabilizing techniques where appropriate.

4) Ingress and egress to this sale is the responsibility of the contractor.

5) Portions of this sale are wet and will require frozen ground/snow covered logging conditions.

6) Mixed hardwood pulp weight estimate is approximately: 1% black ash.

Han Solo

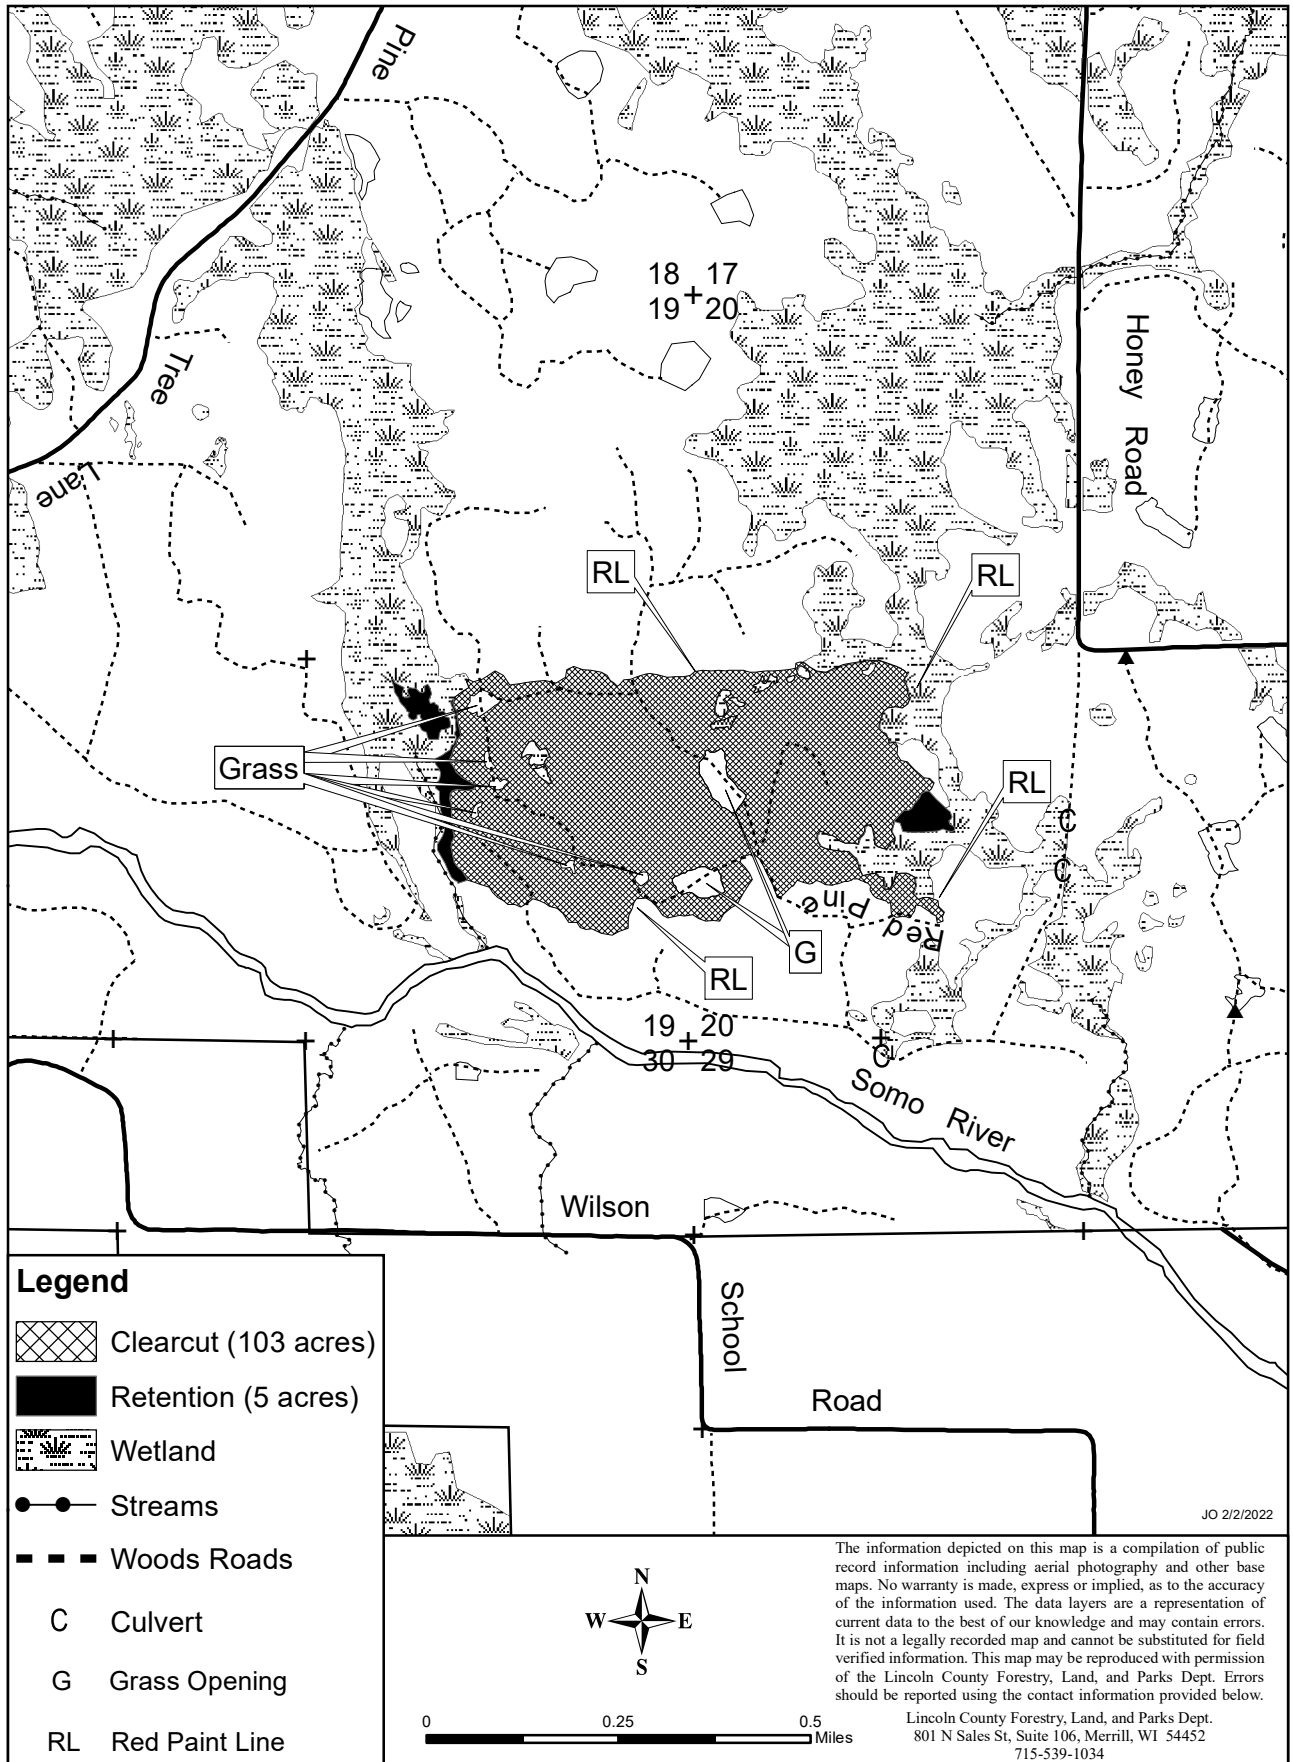

T015-22

**Smola Brothers, Inc.**N3666 Spring Dr.  
Athens, WI 54411Township: **Tomahawk E**Advertised species, products and value for sale tract#: **T016-22-1**Contract Date: **11/14/22****S½ SW S27-T34N-R5E; E½ NE S33-T34N-R5E; NW S34-T34N-R5E**Approximate cutting area: **59** acres

Product Species			Estimated Unit Volume	Approved Bid Per Unit	Estimated Value
20-TA	Aspen Pulp	Tons	875.00	16.50	14,437.50
20-TMX	Mixed Hardwood Pulp	Tons	700.00	15.50	10,850.00
20-TF	Fir Pulp	Tons	65.00	5.00	325.00
10-MX	Mixed Hardwood Sawlogs	MBF	8.00	200.00	1,600.00
Total estimated value of accepted bid					<b>27,212.50</b>

**Cutting Instructions:****Contract Available for Inspection**

1) Clear cut area: cut all living trees greater than 1 inch in diameter except for yellow birch, oak, butternut, spruce, tamarack, pine, cedar, cherry, hemlock, apple, and hawthorn. Do not cut non-merchantable trees in low wet areas and drainages. Pockets of non-merchantable fir that will not impede aspen regeneration may be left uncut with prior approval from the Lincoln County Forestry Department. Selection harvest area: cut all ironwood, all merchantable balsam fir, orange paint marked trees, all purple paint marked trees delineating canopy gaps, and all trees inside of the delineated canopy gaps. Canopy gaps are delineated by purple paint marked trees located on the gap's perimeter. A purple V faces the inside of the canopy gap. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized.

2) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations.

3) Any roadwork will require prior approval from the Lincoln County Forestry Department and must follow BMP guidelines. Contractor is responsible for installing broad based dips, water bars and/or using other soil stabilizing techniques where appropriate.


4) Ingress and egress to this sale is the responsibility of the contractor.

5) Special care must be taken to limit damage to advanced regeneration.

6) In order to protect advanced regeneration whole tree skidding with tops attached will be subject to field approval.

7) Mixed hardwood pulp weight estimate is approximately: 3% white birch, 3% northern red oak and 2% basswood. Mixed hardwood sawlog volume estimate is approximately 43% hard maple, 23% red maple, 23% red oak, and 9% basswood.

Armstrong Ambush

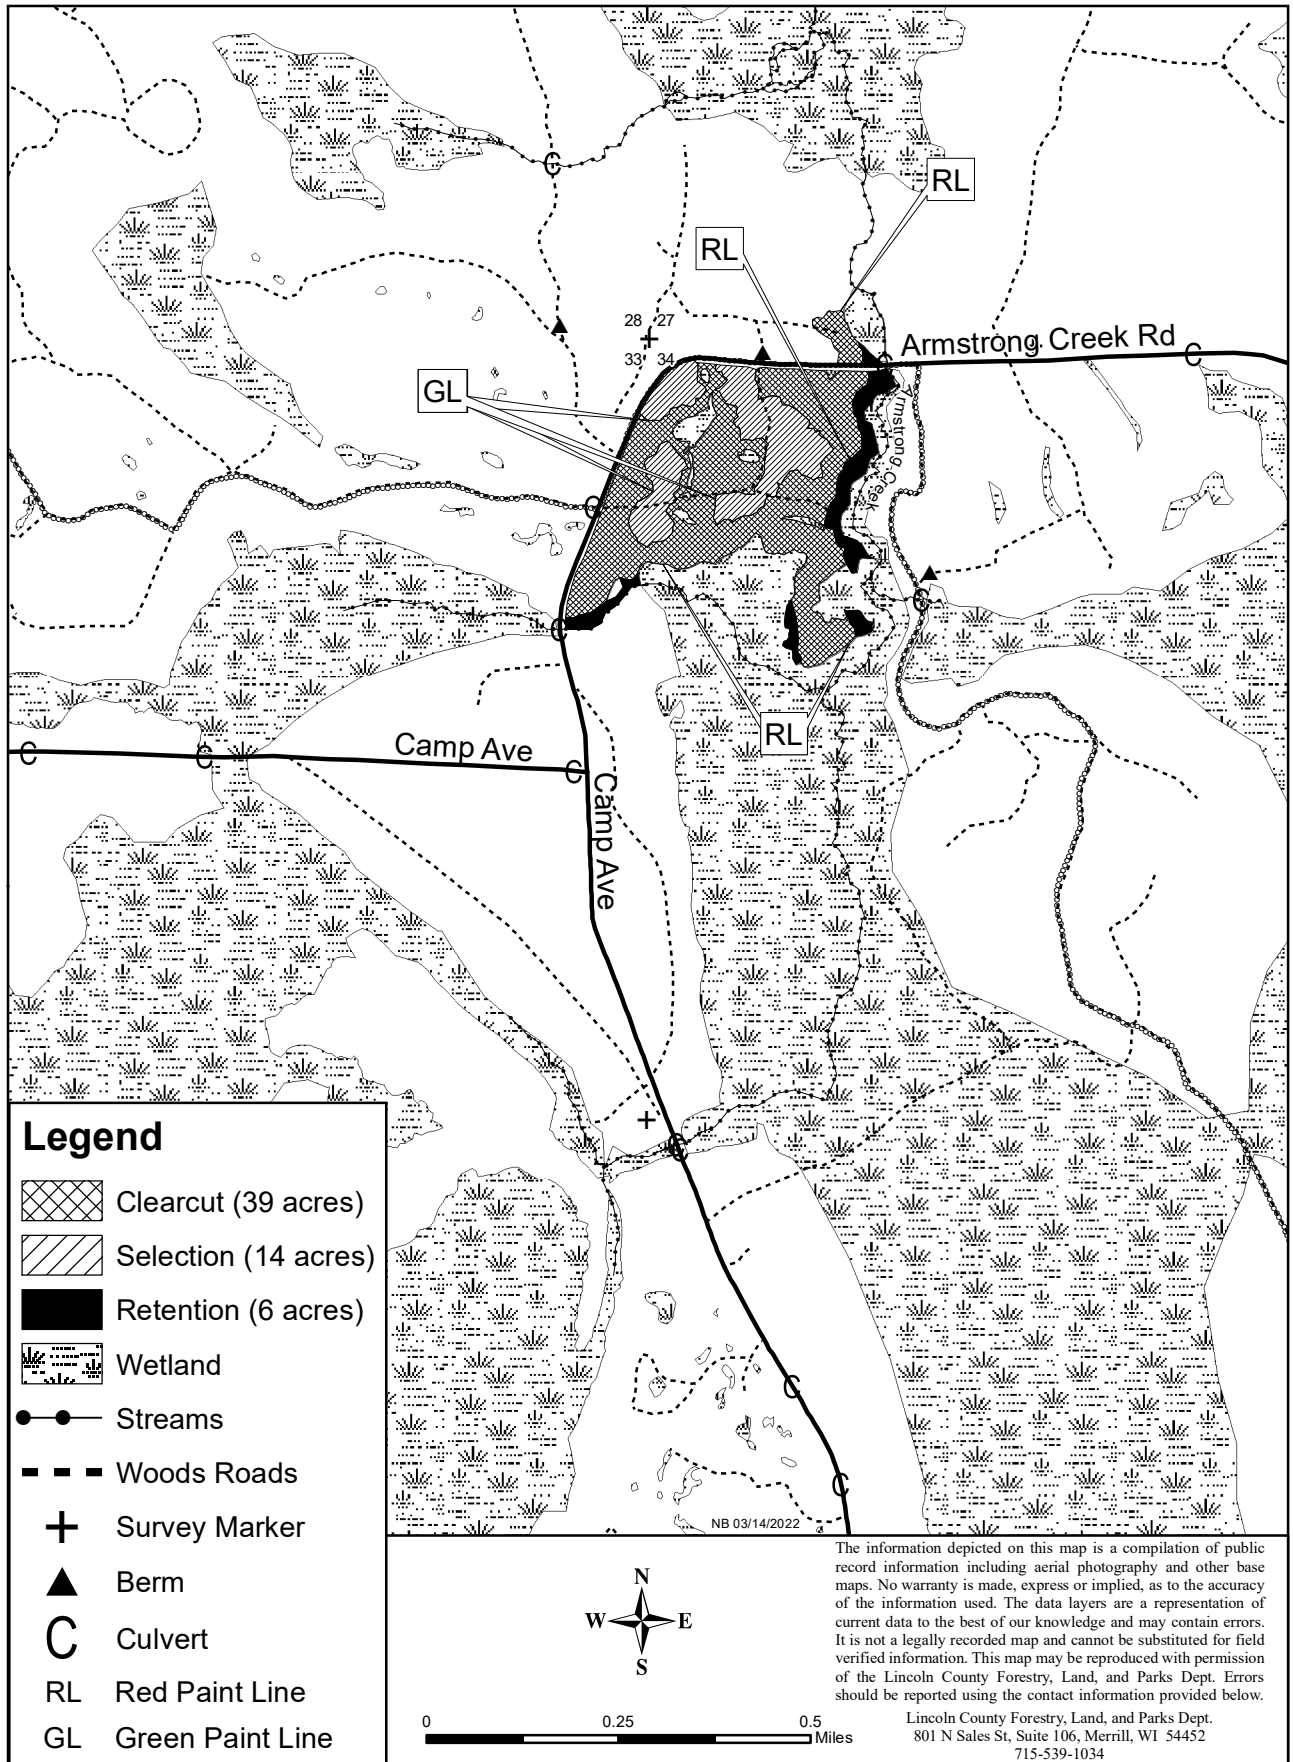

T016-22

**Smola Brothers, Inc.**N3666 Spring Dr.  
Athens, WI 54411Township: **Harding(N)**Advertised species, products and value for sale tract#: **T017-22-1**Contract Date: **11/14/22****SW<sup>1</sup>/<sub>4</sub> NW<sup>1</sup>/<sub>4</sub>, NW<sup>1</sup>/<sub>4</sub> SW<sup>1</sup>/<sub>4</sub> S13-T33N-R5E; E<sup>1</sup>/<sub>2</sub> NE<sup>1</sup>/<sub>4</sub>, SW<sup>1</sup>/<sub>4</sub> NE<sup>1</sup>/<sub>4</sub>, NE<sup>1</sup>/<sub>4</sub> SE<sup>1</sup>/<sub>4</sub> S14-T33N-R5E**Approximate cutting area: **74 acres**


Product Species			Estimated Unit Volume	Approved Bid Per Unit	Estimated Value
20-TA	Aspen Pulp	Tons	110.00	10.10	1,111.00
20-TMX	Mixed Hardwood Pulp	Tons	2,050.00	11.50	23,575.00
20-TBA	Basswood Pulp	Tons	370.00	1.90	703.00
20-TOR	Red Oak Pulp	Tons	150.00	6.50	975.00
10-MX	Mixed Hardwood Sawlogs	MBF	70.00	165.00	11,550.00
10-BA	Basswood Sawlogs	MBF	15.00	130.00	1,950.00
10-MH	Hard Maple Sawlogs	MBF	3.00	250.00	750.00
10-OR	Red Oak Sawlogs	MBF	15.00	300.00	4,500.00
Total estimated value of accepted bid					<b>45,114.00</b>

**Cutting Instructions:**











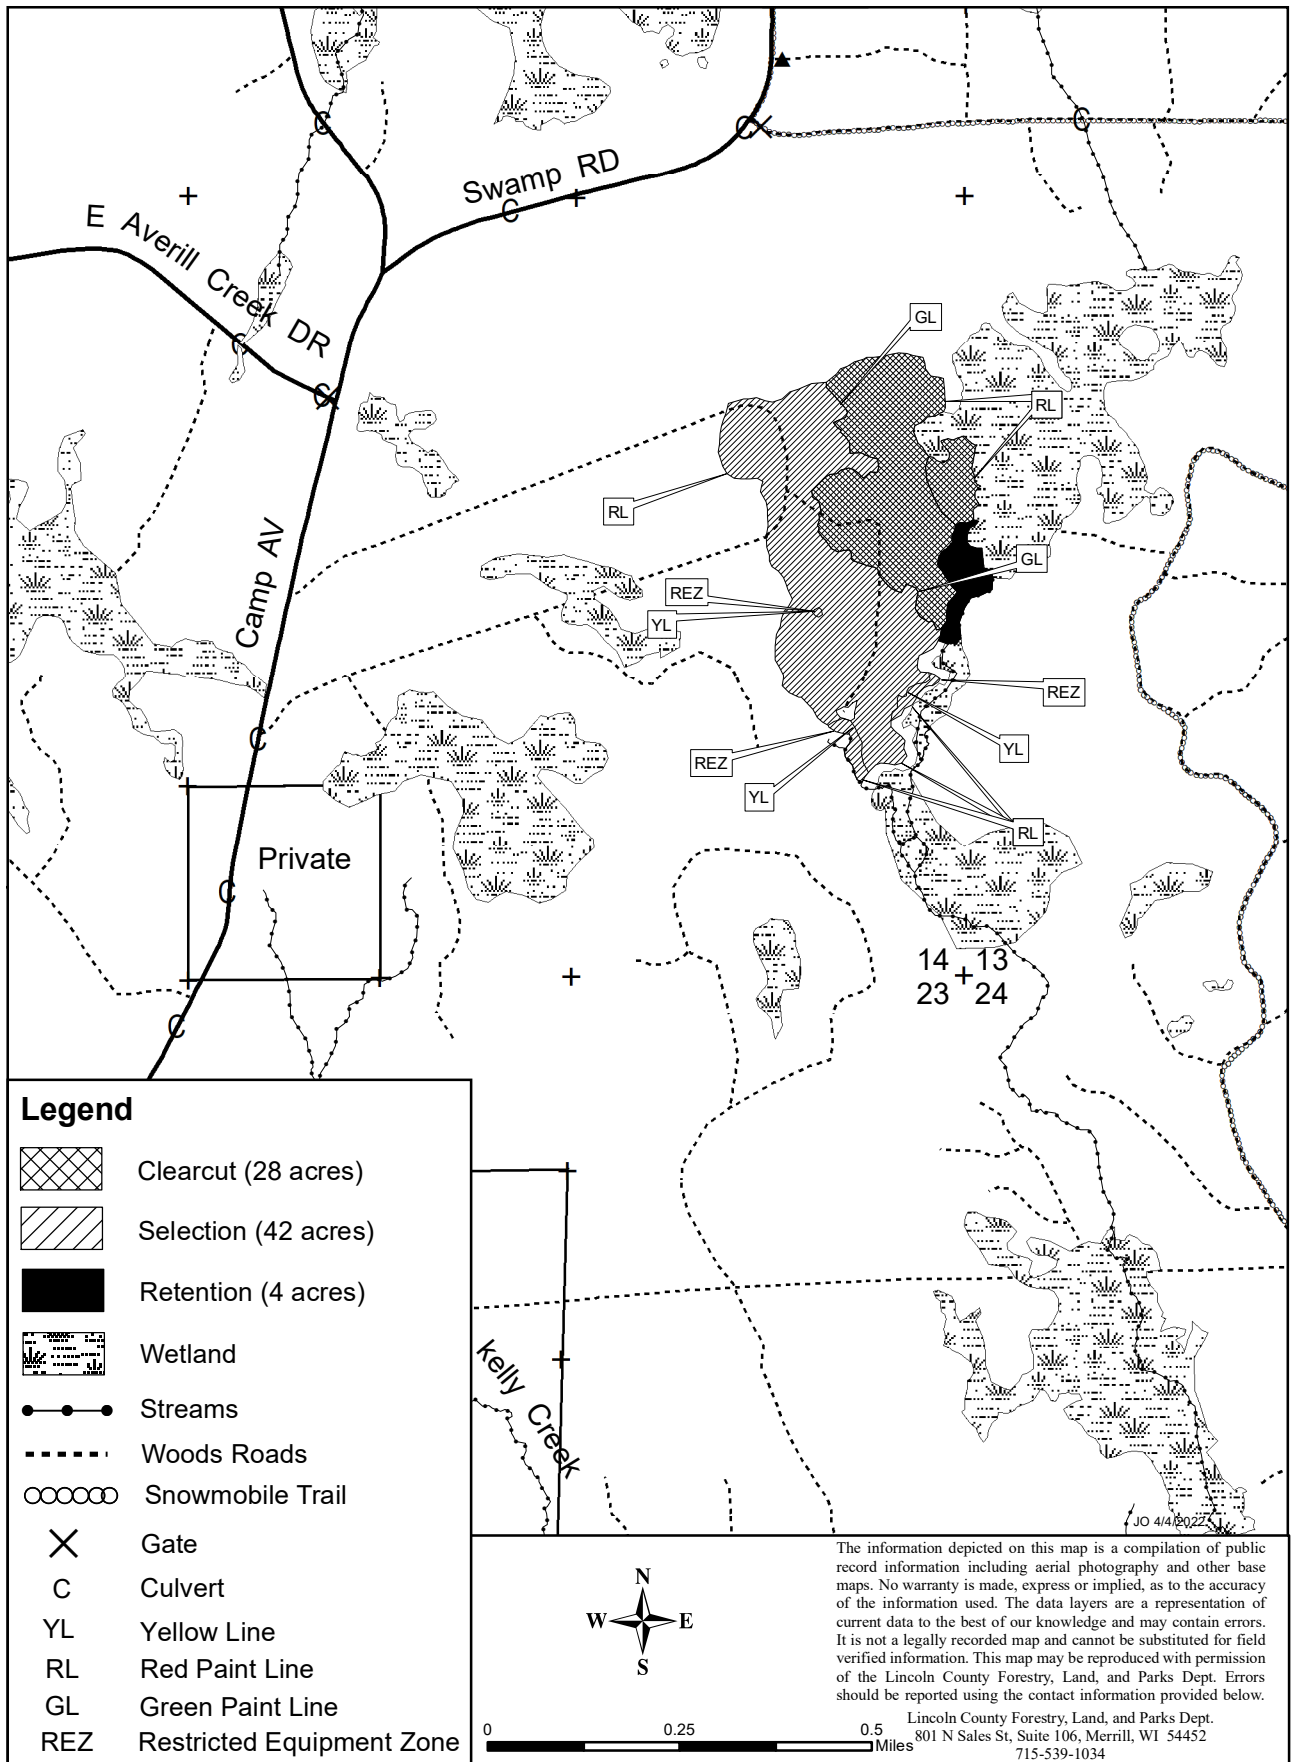


## Contract Available for Inspection

- 1) Clearcut area: Cut all trees greater than 1 inch in diameter except for yellow birch, oak, butternut, spruce, tamarack, pine, cedar, cherry, hemlock, balsam fir, apple, and hawthorn. Selection harvest area: cut all ironwood and orange paint marked trees. Avoid damage to residual trees. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized. Do not residual cut non-merchantable trees in low wet areas and drainages.
- 2) Wheeled or tracked equipment is prohibited in the restricted equipment zone (REZ), unless agreed upon in writing. Biomass harvesting within the REZ is prohibited.
- 3) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations.
- 4) Any roadwork will require prior approval from the Lincoln County Forestry Department and must follow BMP guidelines. Contractor is responsible for installing broad based dips, water bars and/or using other soil stabilizing techniques where appropriate.
- 5) Ingress and egress to this sale is the responsibility of the contractor.
- 6) Portions of this sale are wet and will require frozen ground/snow covered logging conditions.
- 7) Logging activity will be prohibited from April 15 to July 15 of each year to reduce the risk of introducing and/or spreading oak wilt.
- 8) Special care must be taken to limit damage to advanced regeneration.
- 9) In order to protect advanced regeneration whole tree skidding with tops attached will be subject to field approval.
- 10) Mixed hardwood sawlog volume estimate is approximately: 79% white ash; 20% red maple; and less than 1% black ash.

Trolls Hammer



**Legend**

-  Clearcut (28 acres)
-  Selection (42 acres)
-  Retention (4 acres)
-  Wetland
-  Streams
-  Woods Roads
-  Snowmobile Trail
-  Gate
-  Culvert
-  Yellow Line
-  Red Paint Line
-  Green Paint Line
-  Restricted Equipment Zone

The information depicted on this map is a compilation of public record information including aerial photography and other base maps. No warranty is made, express or implied, as to the accuracy of the information used. The data layers are a representation of current data to the best of our knowledge and may contain errors. It is not a legally recorded map and cannot be substituted for field verified information. This map may be reproduced with permission of the Lincoln County Forestry, Land, and Parks Dept. Errors should be reported using the contact information provided below.

Lincoln County Forestry, Land, and Parks Dept.  
 801 N Sales St, Suite 106, Merrill, WI 54452  
 715-539-1034

**Flannel Fleet Logging, LLC**

W4155 Center Ave

Medford, WI 54451


Township: **Harding(N)**Advertised species, products and value for sale tract#: **T018-22-1**Contract Date: **11/14/22****W½ SW¼ S25-T33N-R5E; E½ SE¼ S26-T33N-R5E**Approximate cutting area: **42** acres

Product Species			Estimated Unit Volume	Approved Bid Per Unit	Estimated Value
20-TA	Aspen Pulp	Tons	2,250.00	17.54	39,465.00
20-TMX	Mixed Hardwood Pulp	Tons	240.00	17.54	4,209.60
Total estimated value of accepted bid					<b>43,674.60</b>








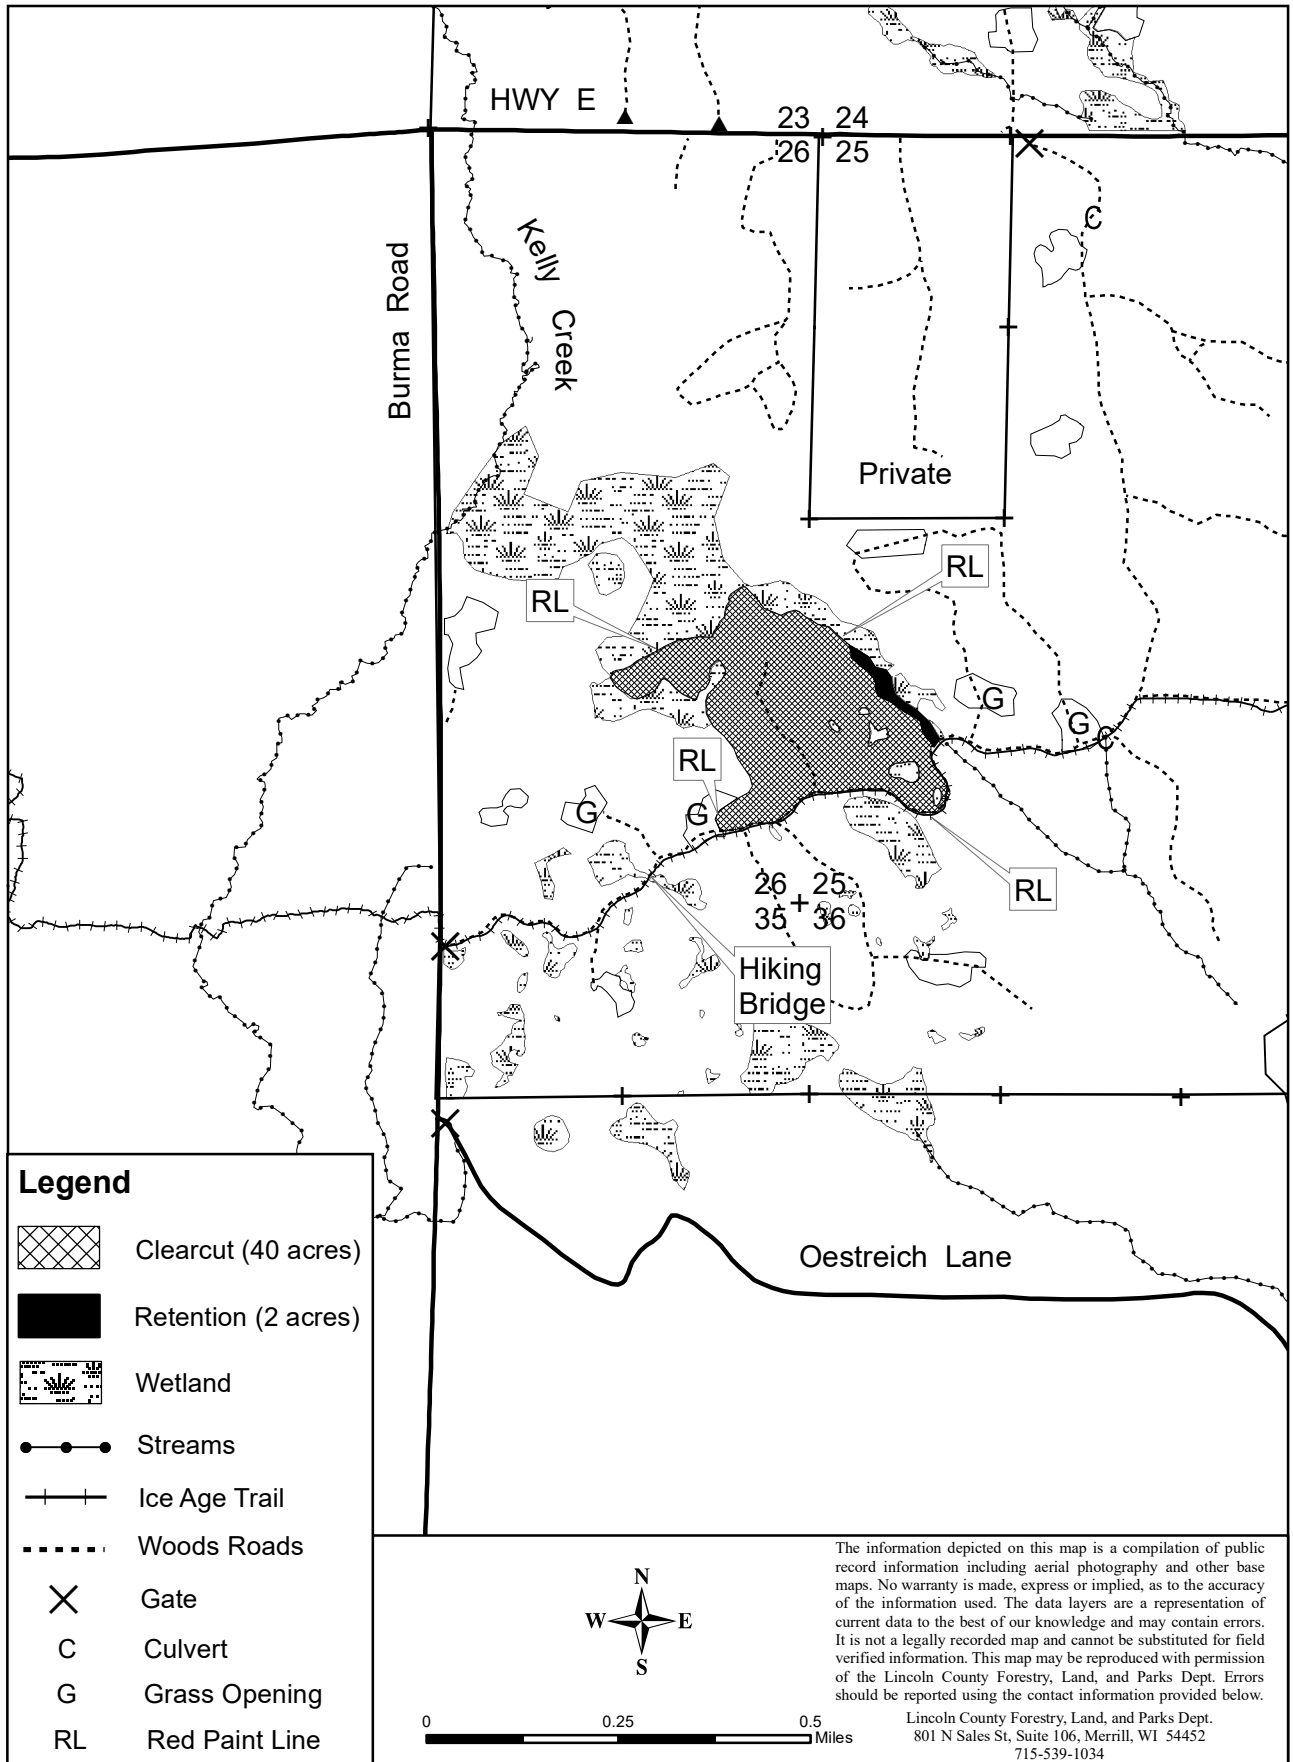


**Cutting Instructions:****Contract Available for Inspection**



- 1) Clearcut area: cut all living trees greater than 1 inch in diameter except for oak, butternut, spruce, tamarack, pine, cedar, cherry, hemlock, balsam fir, apple, and hawthorn. Do not cut non-merchantable trees in low wet areas and drainages. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized.
- 2) Any roadwork will require prior approval from the Lincoln County Forestry Department and must follow BMP guidelines. Contractor is responsible for installing broad based dips, water bars and/or using other soil stabilizing techniques where appropriate.
- 3) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations.
- 4) Ingress and egress to this sale is the responsibility of the contractor.
- 5) Gates/Berms removed or damaged by the contractor must be restored to original or better condition when the sale becomes inactive and upon sale completion.
- 6) Unless unavoidable, skidding down The Ice Age Trail is prohibited.
- 7) Mixed hardwood pulp weight estimate is approximately: 36% white birch.

Ghost Division



**Legend**

-  Clearcut (40 acres)
-  Retention (2 acres)
-  Wetland
-  Streams
-  Ice Age Trail
-  Woods Roads
-  Gate
-  Culvert
-  Grass Opening
-  Red Paint Line

The information depicted on this map is a compilation of public record information including aerial photography and other base maps. No warranty is made, express or implied, as to the accuracy of the information used. The data layers are a representation of current data to the best of our knowledge and may contain errors. It is not a legally recorded map and cannot be substituted for field verified information. This map may be reproduced with permission of the Lincoln County Forestry, Land, and Parks Dept. Errors should be reported using the contact information provided below.

Lincoln County Forestry, Land, and Parks Dept.  
 801 N Sales St, Suite 106, Merrill, WI 54452  
 715-539-1034



**Flannel Fleet Logging, LLC**

W4155 Center Ave

Medford, WI 54451


Township: **Harrison(N)**Advertised species, products and value for sale tract#: **T019-22-1**Contract Date: **11/14/22****E½ NE¼ S11-T35N-R8E**Approximate cutting area: **36 acres**

Product Species			Estimated Unit Volume	Approved Bid Per Unit	Estimated Value
20-TMX	Mixed Hardwood Pulp	Tons	800.00	14.50	11,600.00
20-TBA	Basswood Pulp	Tons	130.00	9.60	1,248.00
20-TOR	Red Oak Pulp	Tons	200.00	12.25	2,450.00
10-MX	Mixed Hardwood Sawlogs	MBF	15.00	215.00	3,225.00
10-BA	Basswood Sawlogs	MBF	3.00	165.00	495.00
10-OR	Red Oak Sawlogs	MBF	15.00	356.00	5,340.00
Total estimated value of accepted bid					<b>24,358.00</b>








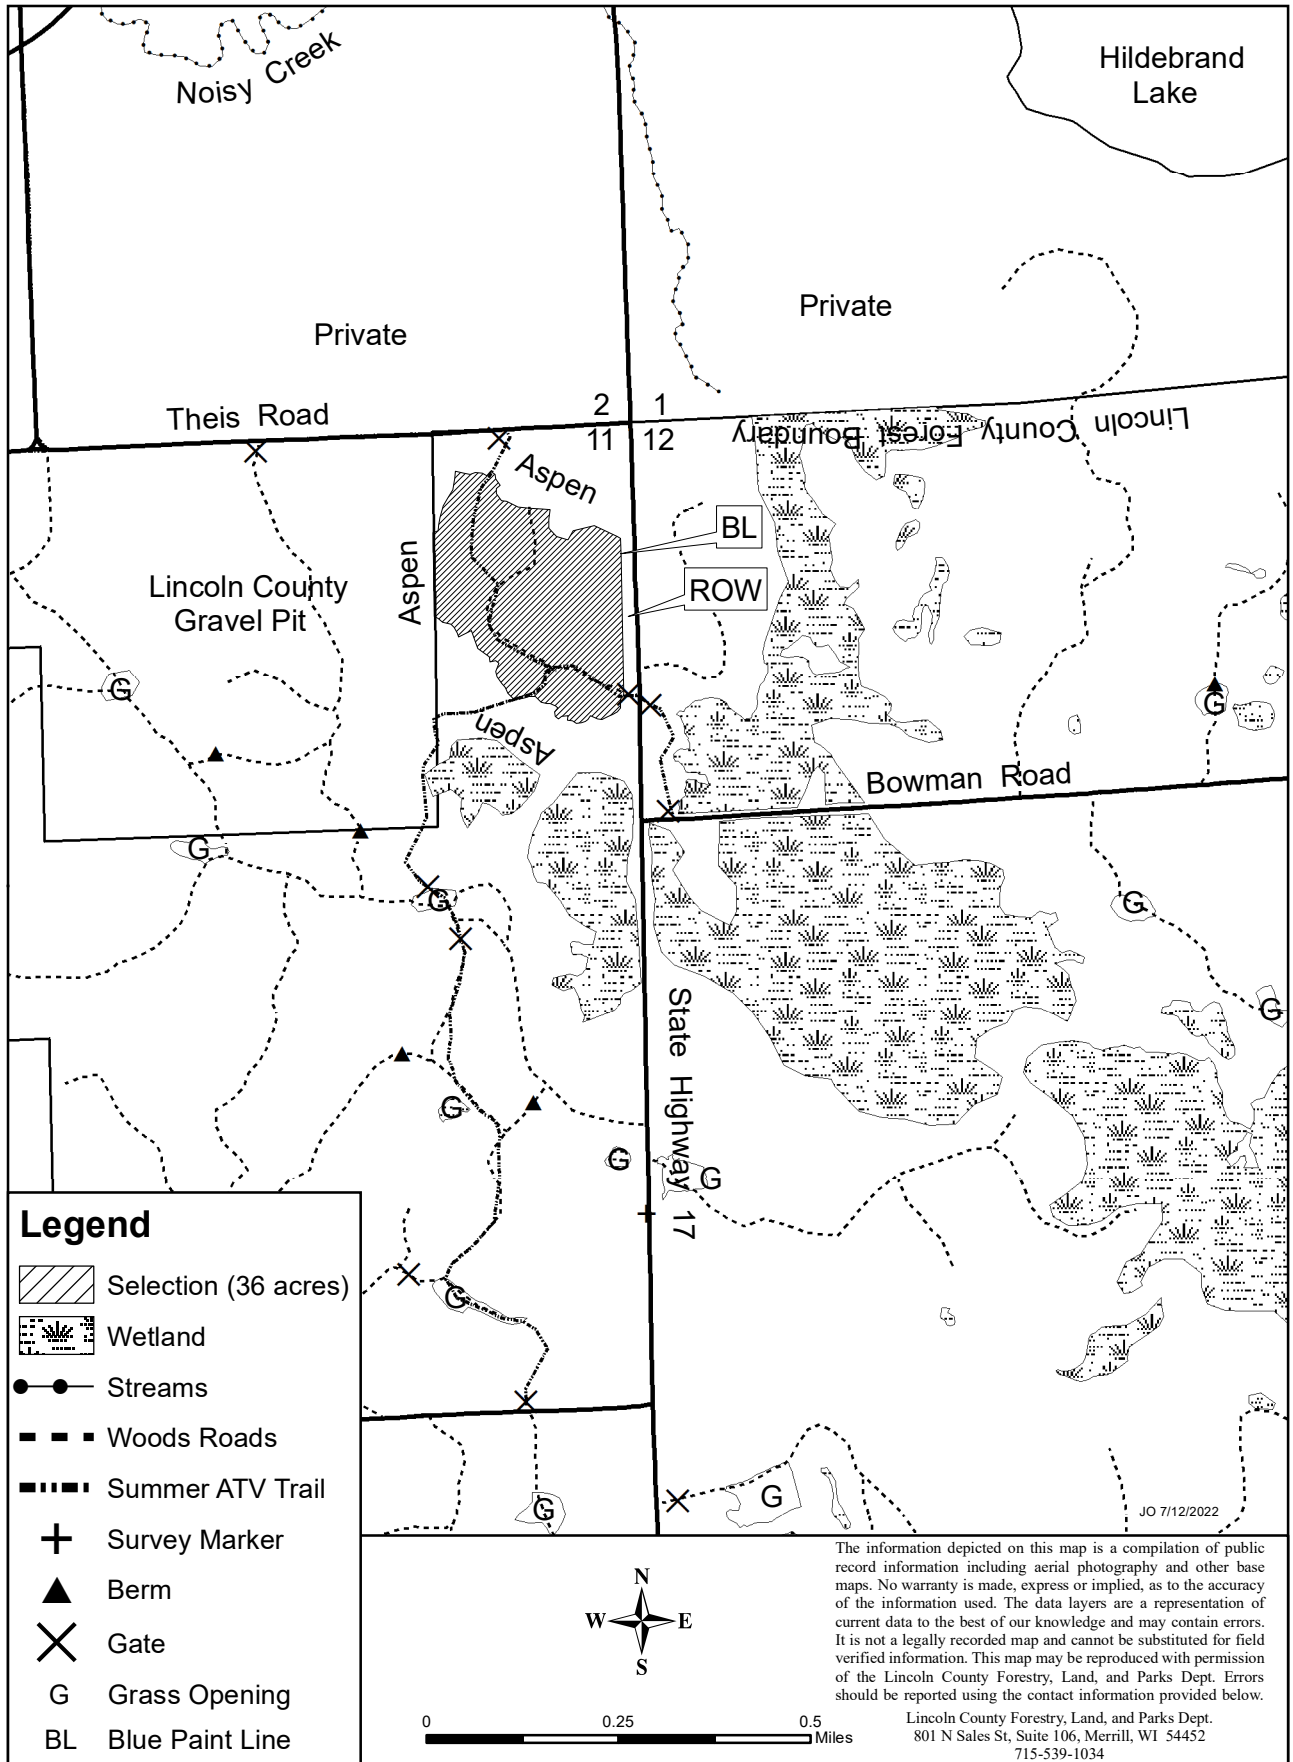


**Cutting Instructions:****Contract Available for Inspection**


- 1) Selection harvest area: cut all ironwood and orange paint marked trees. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized.
- 2) Logging activity will be prohibited from April 15 to July 15 of each year to reduce the risk of introducing and/or spreading oak wilt.
- 3) Gates/Berms removed or damaged by the contractor must be restored to original or better condition when the sale becomes inactive and upon sale completion.
- 4) Ingress and egress to this sale is the responsibility of the contractor.
- 5) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations.
- 6) Any roadwork will require prior approval from the Lincoln County Forestry Department and must follow BMP guidelines. Contractor is responsible for installing broad based dips, water bars and/or using other soil stabilizing techniques where appropriate.
- 7) Special care must be taken to limit damage to advanced regeneration.
- 8) Mixed hardwood pulp weight estimate is approx.: 3% white birch. Red oak sawlog volume estimate is approx.: 3% hard maple. Mixed hardwood sawlog volume estimate is approx.: 96% white ash and 4% white birch.

Rambo



**Legend**

-  Selection (36 acres)
-  Wetland
-  Streams
-  Woods Roads
-  Summer ATV Trail
-  Survey Marker
-  Berm
-  Gate
-  Grass Opening
-  Blue Paint Line



The information depicted on this map is a compilation of public record information including aerial photography and other base maps. No warranty is made, express or implied, as to the accuracy of the information used. The data layers are a representation of current data to the best of our knowledge and may contain errors. It is not a legally recorded map and cannot be substituted for field verified information. This map may be reproduced with permission of the Lincoln County Forestry, Land, and Parks Dept. Errors should be reported using the contact information provided below.

Lincoln County Forestry, Land, and Parks Dept.  
 801 N Sales St, Suite 106, Merrill, WI 54452  
 715-539-1034

**Kleinschmidt Logging, LLC**

179553 Hilly Acres Rd

Eland, WI 54427

Township: **Harding(N)**Advertised species, products and value for sale tract#: **T021-22-1**Contract Date: **11/14/22****E<sup>1</sup>/<sub>2</sub> SW<sup>1</sup>/<sub>4</sub>, W<sup>1</sup>/<sub>2</sub> SE<sup>1</sup>/<sub>4</sub> S17-T33N-R5E; NW<sup>1</sup>/<sub>4</sub> NE<sup>1</sup>/<sub>4</sub> S20-T33N-R5E**Approximate cutting area: **49** acres

Product Species			Estimated Unit Volume	Approved Bid Per Unit	Estimated Value
20-TA	Aspen Pulp	Tons	1,800.00	8.20	14,760.00
20-TMX	Mixed Hardwood Pulp	Tons	60.00	7.40	444.00
Total estimated value of accepted bid					<b>15,204.00</b>

**Cutting Instructions:****Contract Available for Inspector**

1) Clearcut area: cut all living trees greater than 1 inch in diameter except for basswood, yellow birch, oak, butternut, spruce, tamarack, pine, cedar, cherry, hemlock, balsam fir, apple, and hawthorn. Do not cut non-merchantable trees in low wet areas and drainages. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized.

2) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations.


3) Portions of this sale are wet and will require frozen ground/snow covered logging conditions.

4) Ingress and egress to this sale is the responsibility of the contractor.

5) Gates/Berms removed or damaged by the contractor must be restored to original or better condition when the sale becomes inactive and upon sale completion.

6) Mixed hardwood pulp weight estimate is approximately: 50% ash and 50% red maple.

Doc Holliday

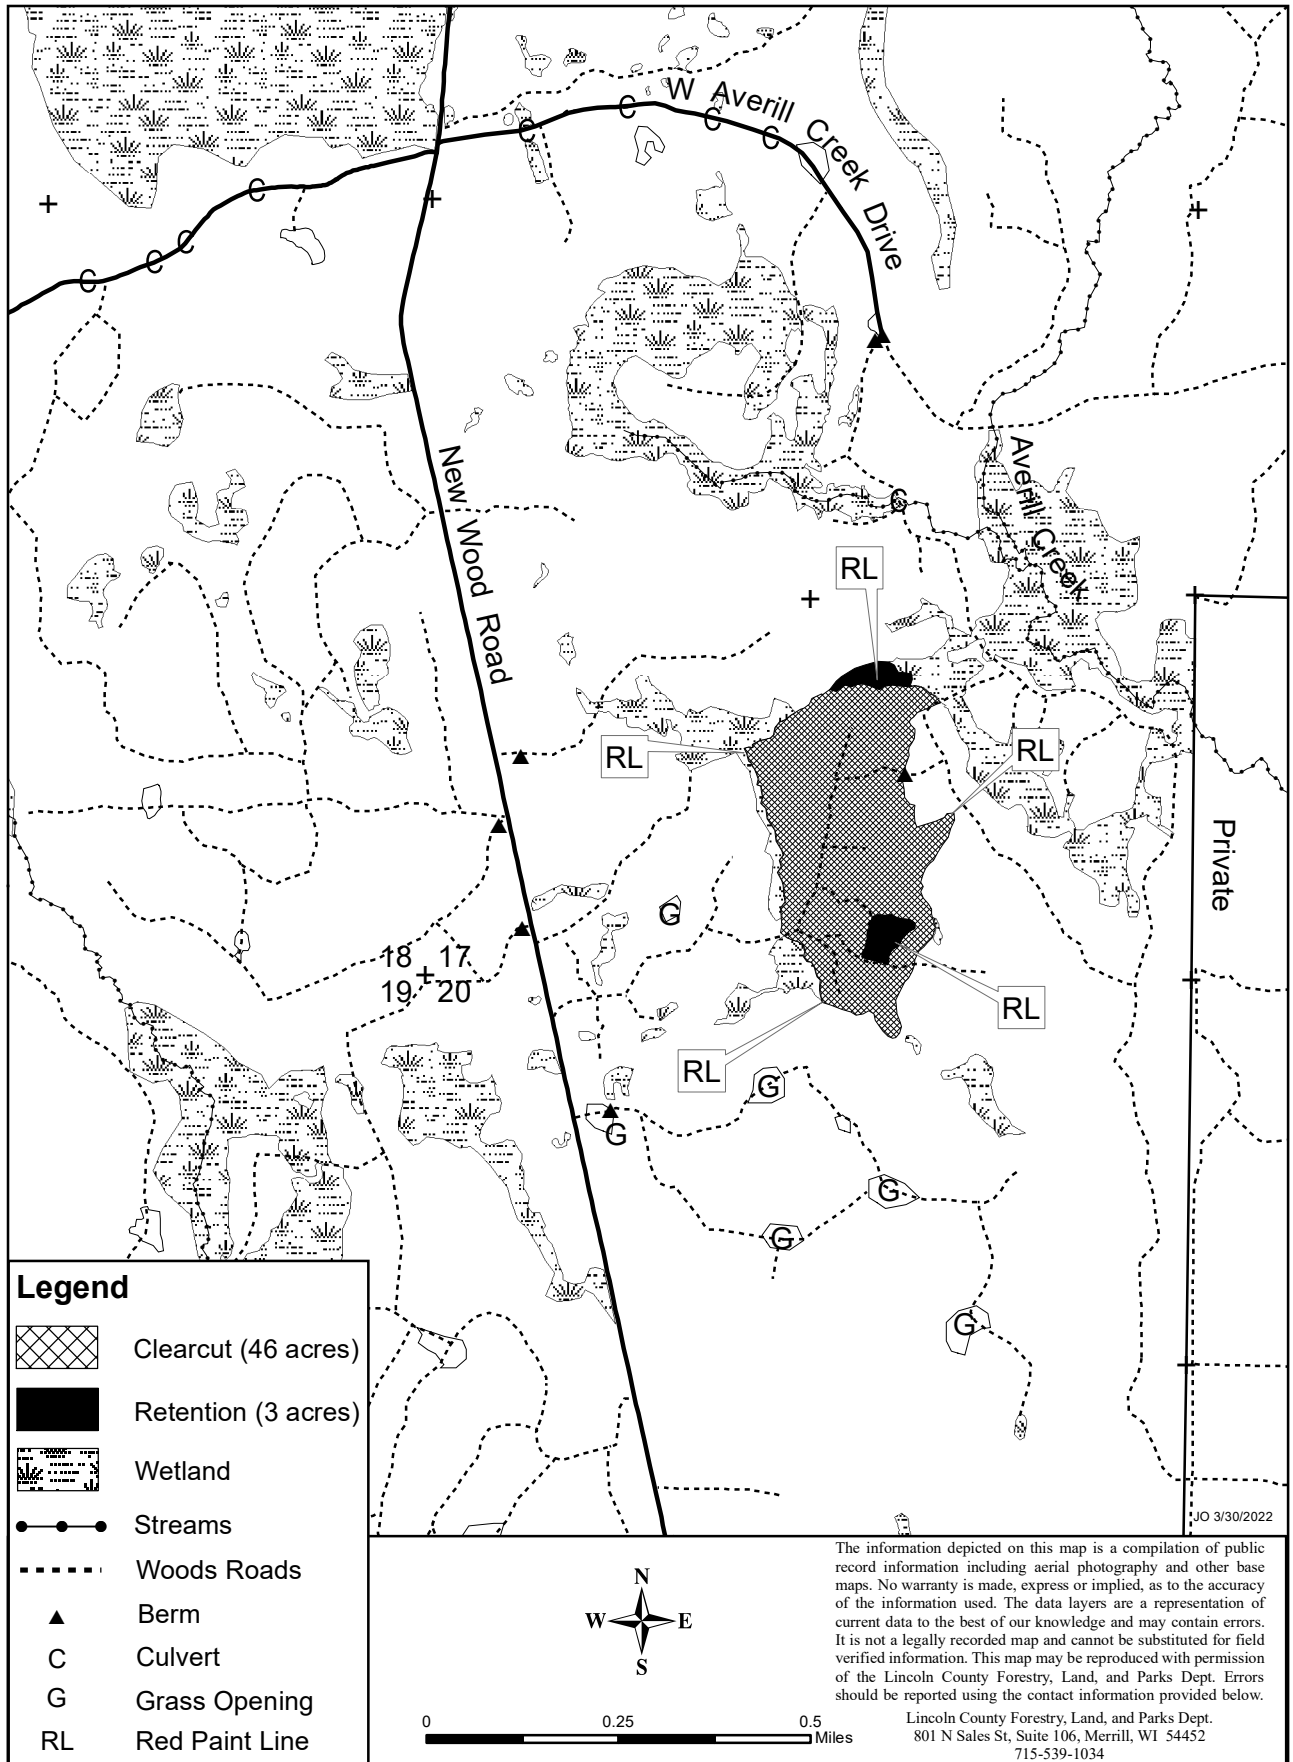

T021-22

**Flannel Fleet Logging, LLC**

W4155 Center Ave  
 Medford, WI 54451  
 Township: **Harding**

Advertised species, products and value for sale tract#: **T022-22-1**

Contract Date: **11/14/22**

**SW SE S30-T33N-R5E; W½ NE, E½ NW, NE NE S31-T33N-R5E**

Approximate cutting area: **59** acres


Product Species	Estimated Unit Volume	Approved Bid Per Unit	Estimated Value
20-TA Aspen Pulp	Tons 1,100.00	15.60	17,160.00
20-TMX Mixed Hardwood Pulp	Tons 750.00	14.10	10,575.00
10-MX Mixed Hardwood Sawlogs	MBF 5.00	215.00	1,075.00
10-BA Basswood Sawlogs	MBF 5.00	165.00	825.00
10-MH Hard Maple Sawlogs	MBF 10.00	431.00	4,310.00
Total estimated value of accepted bid			<b>33,945.00</b>

**Cutting Instructions:**

Contract Available for Inspection

- 1) Clearcut area: cut all living trees greater than 1 inch in diameter except for yellow birch, oak, butternut, spruce, tamarack, pine, cedar, cherry, hemlock, balsam fir, apple and hawthorn. Do not cut non-merchantable trees in low wet areas and drainages. Selection harvest area: cut all ironwood, orange paint marked trees, all purple paint marked trees delineating canopy gaps, and all trees inside of the delineated canopy gaps. Canopy gaps are delineated by purple paint marked trees located on the gap's perimeter. A purple V faces the inside of the canopy gap. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized.
- 2) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations.
- 3) Any roadwork will require prior approval from the Lincoln County Forestry Department and must follow BMP guidelines. Contractor is responsible for installing broad based dips, water bars and/or using other soil stabilizing techniques where appropriate.
- 4) Portions of this sale are wet and will require frozen ground/snow covered logging conditions.
- 5) Gates/Berms removed or damaged by the contractor must be restored to original or better condition when the sale becomes inactive and upon sale completion.
- 6) Special care must be taken to limit damage to advanced regeneration.
- 7) Ingress and egress to this sale is the responsibility of the contractor.
- 8) Mixed hardwood pulp weight estimate is approximately: 3% white birch & 1% basswood. Mixed hardwood sawlog volume estimate is approximately: 60% red maple, 10% black ash, and 29% white ash.

Bevis

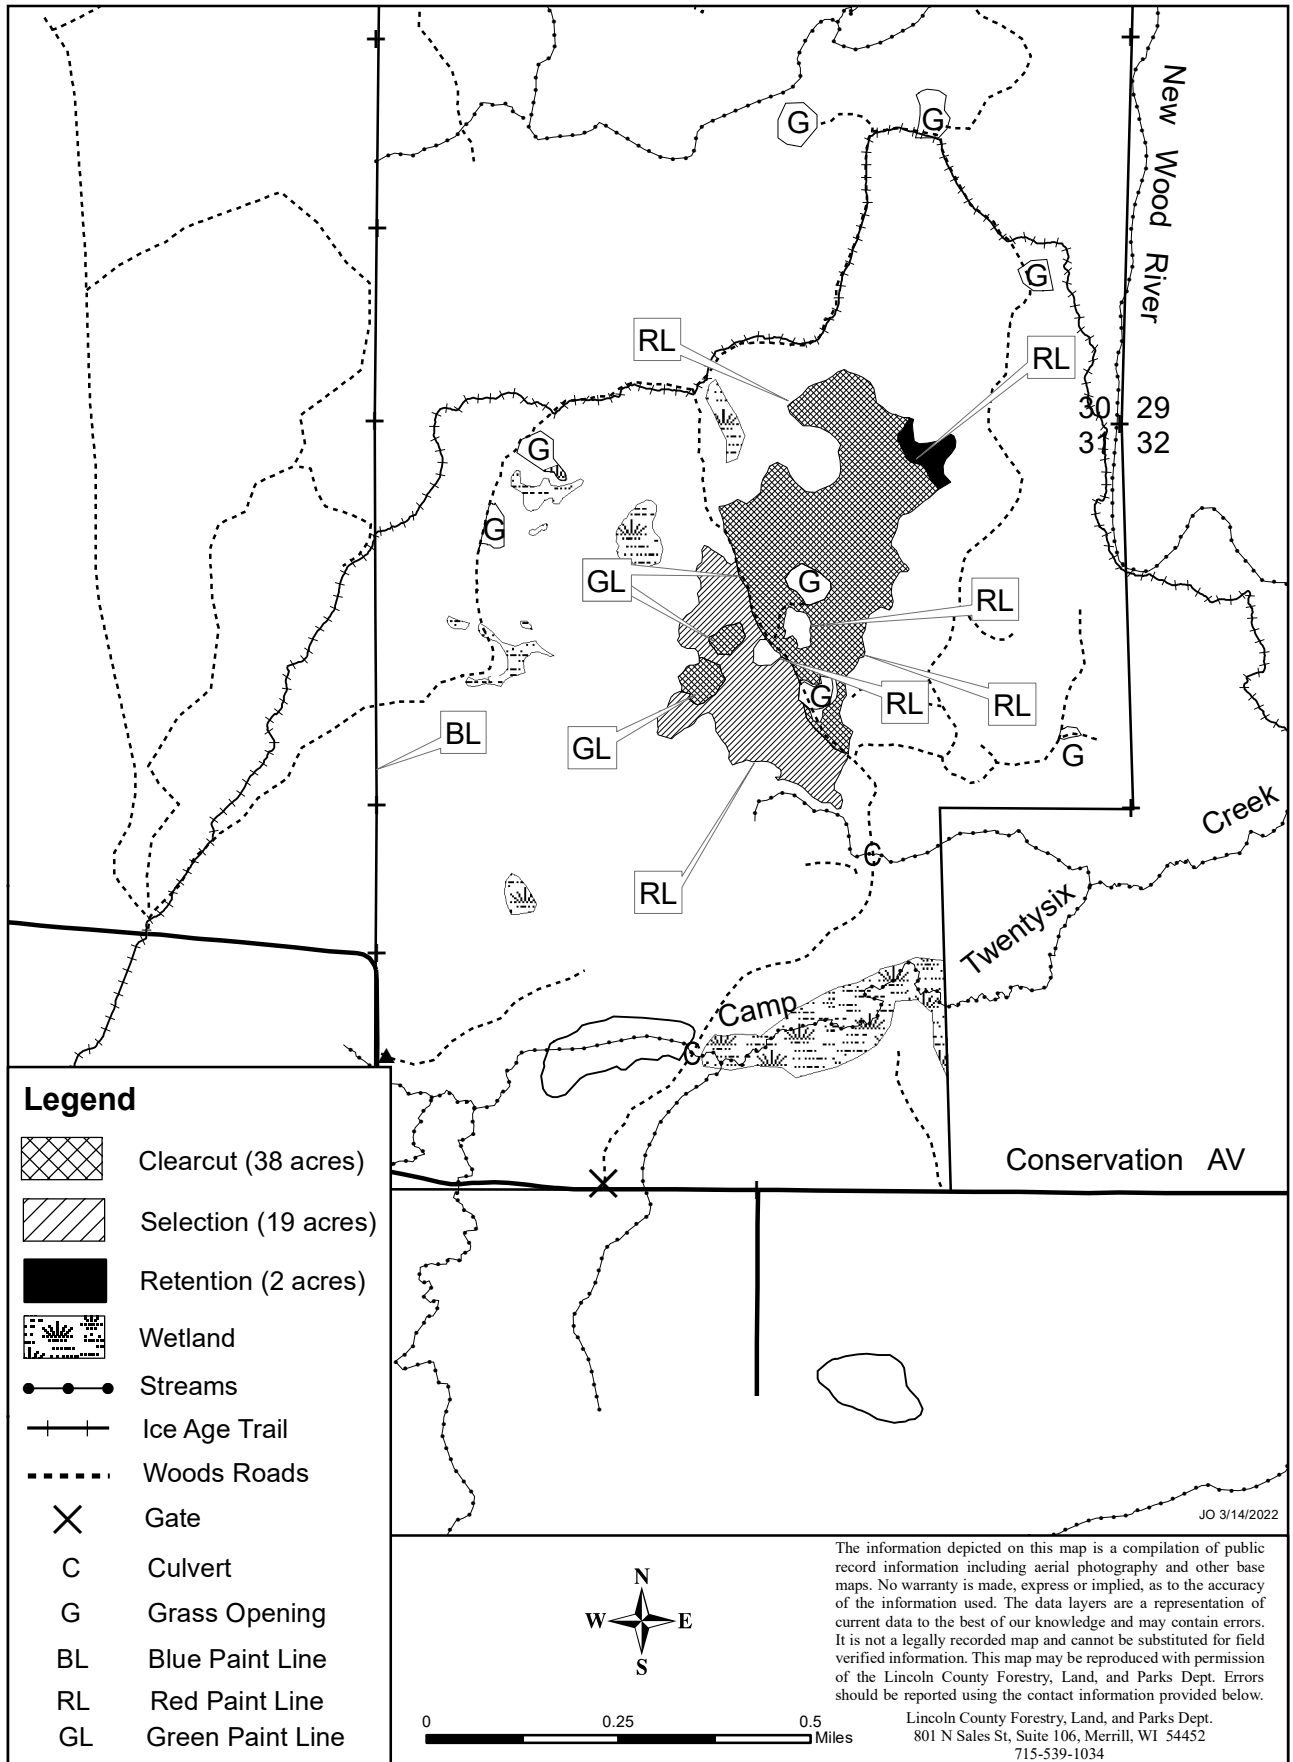

T022-22

**Flannel Fleet Logging, LLC**

W4155 Center Ave

Medford, WI 54451

Township: **Tomahawk**Advertised species, products and value for sale tract#: **T023-22-1**Contract Date: **11/14/22****E<sup>1</sup>/<sub>2</sub> NW<sup>1</sup>/<sub>4</sub>, NE<sup>1</sup>/<sub>4</sub> SW<sup>1</sup>/<sub>4</sub>, NW<sup>1</sup>/<sub>4</sub> SE<sup>1</sup>/<sub>4</sub> S16-T34N-R4E**Approximate cutting area: **45 acres**


Product Species			Estimated Unit Volume	Approved Bid Per Unit	Estimated Value
20-TA	Aspen Pulp	Tons	600.00	19.10	11,460.00
20-TMX	Mixed Hardwood Pulp	Tons	600.00	16.10	9,660.00
20-TBA	Basswood Pulp	Tons	30.00	9.60	288.00
10-MX	Mixed Hardwood Sawlogs	MBF	15.00	215.00	3,225.00
10-BA	Basswood Sawlogs	MBF	6.00	165.00	990.00
10-MH	Hard Maple Sawlogs	MBF	45.00	425.00	19,125.00
Total estimated value of accepted bid					<b>44,748.00</b>

**Cutting Instructions:**

Contract Available for Inspection

- 1) Clear cut area: cut all living trees greater than 1 inch in diameter except for yellow birch, oak, butternut, spruce, tamarack, pine, cedar, cherry, hemlock, balsam fir, apple and hawthorn. Do not cut non-merchantable trees in low wet areas and drainages. Selection harvest area: cut all ironwood, orange paint marked trees, all purple paint marked trees delineating canopy gaps, and all trees inside of the delineated canopy gaps. Canopy gaps are delineated by purple paint marked trees located on the gap's perimeter. A purple V faces the inside of the canopy gap. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized.
- 2) Special care must be taken to not damage or disturb survey markers.
- 3) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations.
- 4) Any roadwork will require prior approval from the Lincoln County Forestry Department and must follow BMP guidelines. Contractor is responsible for installing broad based dips, water bars and/or using other soil stabilizing techniques where appropriate.
- 5) Ingress and egress to this sale is the responsibility of the contractor.
- 6) Special care must be taken to limit damage to advanced regeneration.
- 7) In order to protect advanced regeneration whole tree skidding with tops attached will be subject to field approval.
- 8) Mixed hardwood sawlog volume estimate is approximately: 77% red maple; 20% black ash; and, 2% yellow birch.

Serpentine

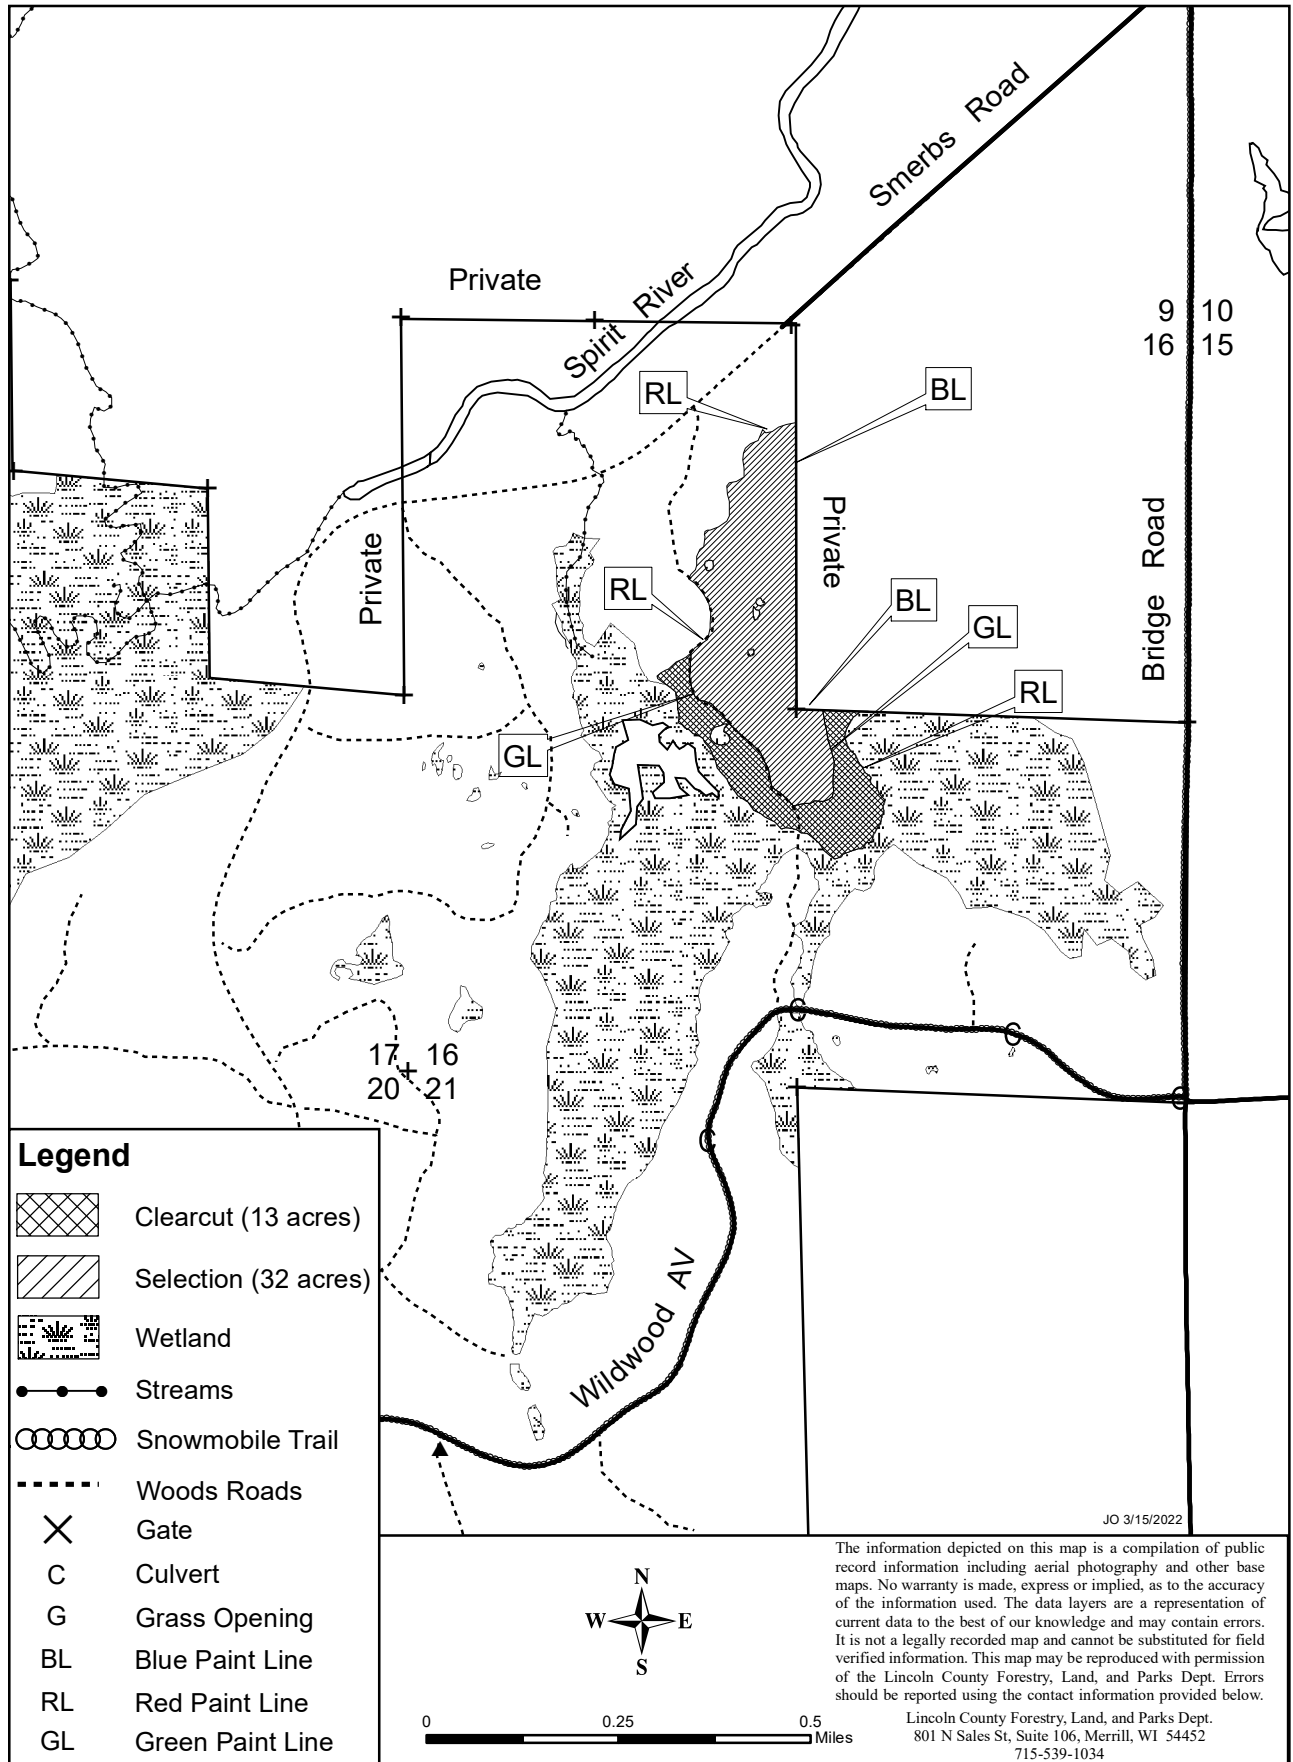

T023-22



**Wilson Forestry, LLC**

114701 Township Road

Athens, WI 54411


Township: **Somo**Advertised species, products and value for sale tract#: **T024-22-1**Contract Date: **11/14/22****SW S22-T35N-R4E; N½ NW S27-T35N-R4E**Approximate cutting area: **85 acres**

Product Species			Estimated Unit Volume	Approved Bid Per Unit	Estimated Value
20-TA	Aspen Pulp	Tons	3,100.00	15.00	46,500.00
20-TMX	Mixed Hardwood Pulp	Tons	650.00	15.00	9,750.00
Total estimated value of accepted bid					<b>56,250.00</b>

**Cutting Instructions:****Contract Available for Inspection**

- 1) Clearcut area: cut all living trees greater than 1 inch in diameter except for oak, butternut, spruce, tamarack, pine, cedar, cherry, hemlock, balsam fir, apple, and hawthorn. Do not cut non-merchantable trees in low wet areas and drainages. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized.
- 2) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations
- 3) Any roadwork will require prior approval from the Lincoln County Forestry Department and must follow BMP guidelines. Contractor is responsible for installing broad based dips, water bars and/or using other soil stabilizing techniques where appropriate.
- 4) Ingress and egress to this sale is the responsibility of the contractor.
- 5) Permission must be granted by the Forestry Department to use the snowmobile trail from December 1 to March 31. Ample snow cover must be maintained to allow safe snowmobile operation.
- 6) Mixed hardwood pulp weight estimate is approximately: 1% basswood. Mixed hardwood pulp weight estimate includes approximately 5 MBF of red maple logs.

Two Holer

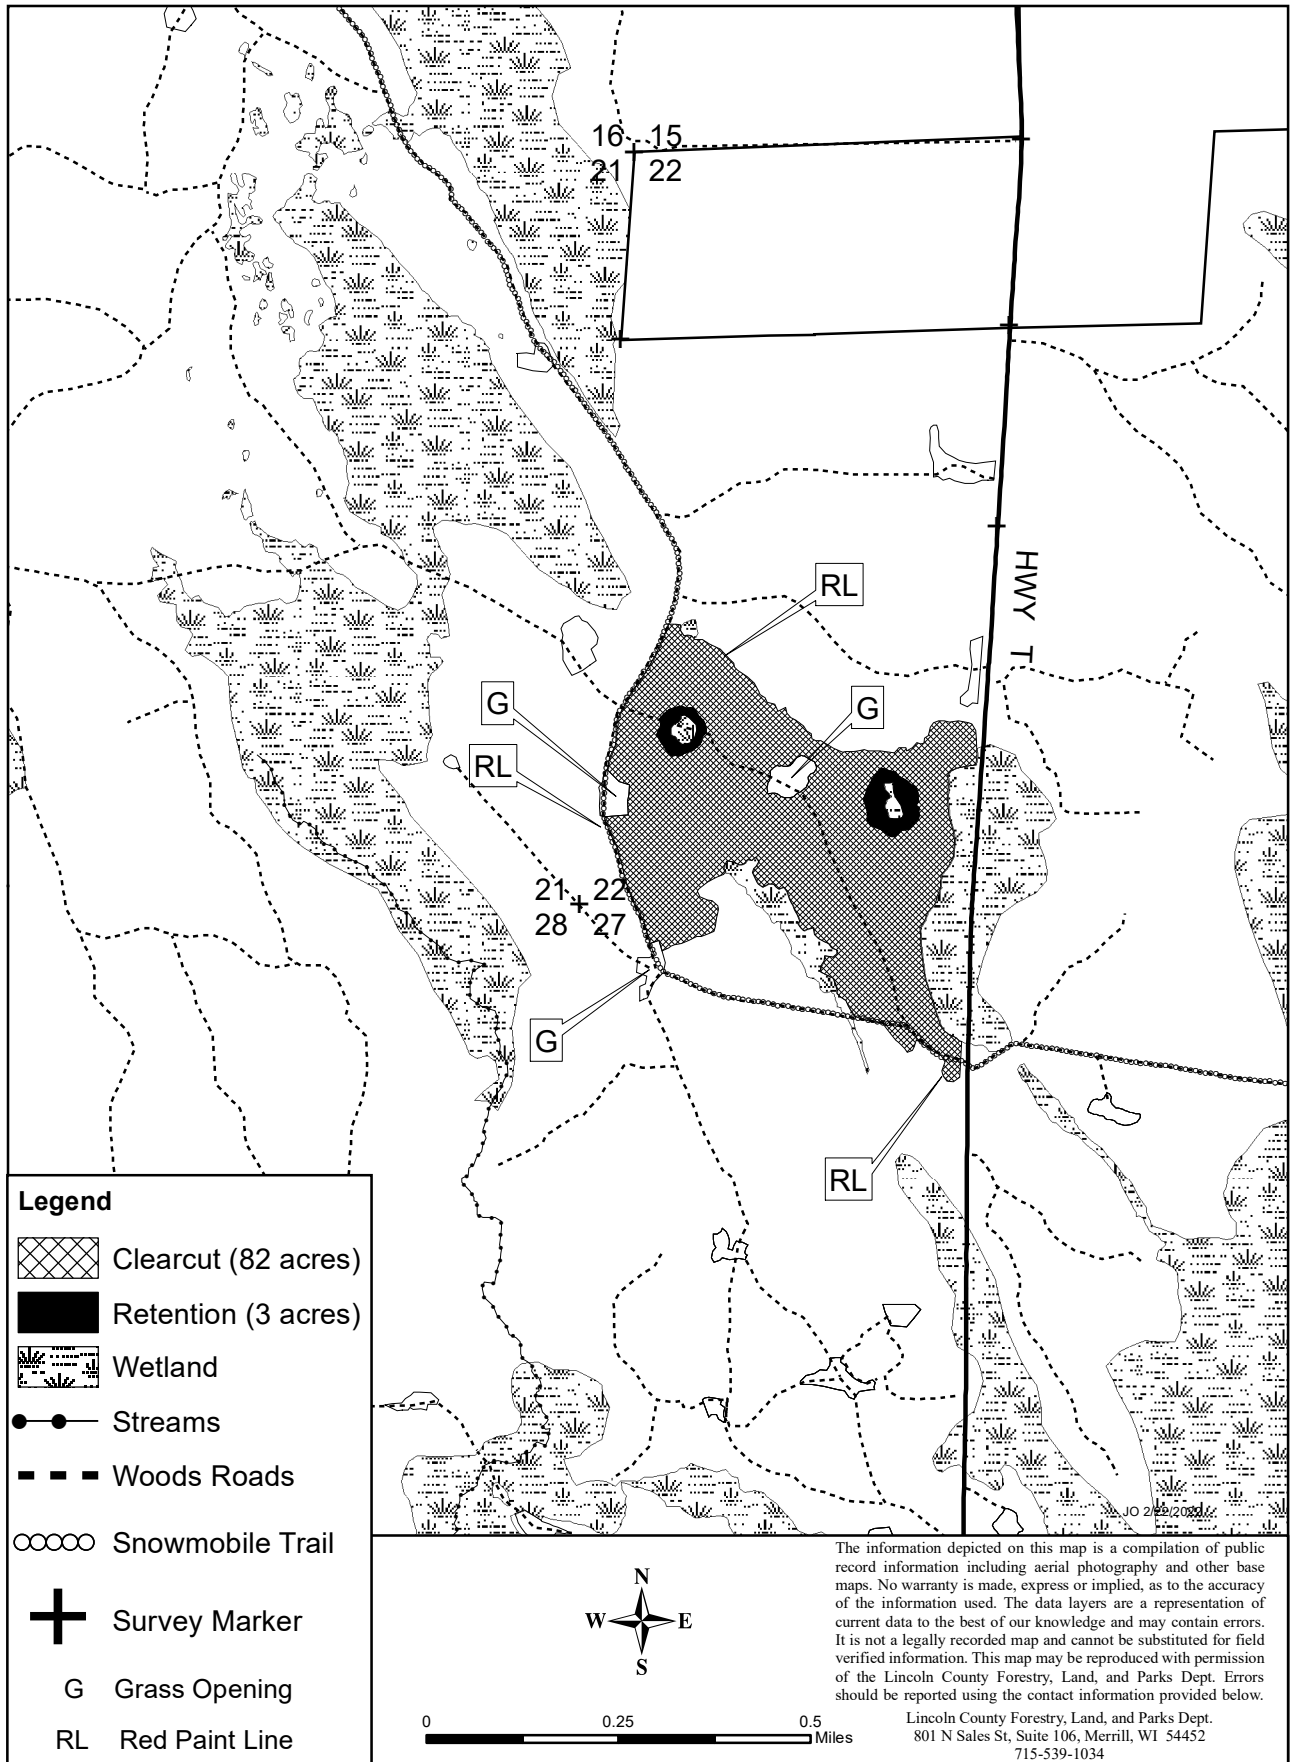

T024-22

**Wilson Forestry, LLC**

114701 Township Road

Athens, WI 54411

Township: **Tomahawk(W)**Advertised species, products and value for sale tract#: **T025-22-1**Contract Date: **11/14/22****NW S36-T34N-R4E**Approximate cutting area: **37** acres


Product Species	Estimated Unit Volume	Approved Bid Per Unit	Estimated Value
20-TA Aspen Pulp	Tons 1,550.00	16.00	24,800.00
20-TMX Mixed Hardwood Pulp	Tons 200.00	12.00	2,400.00
Total estimated value of accepted bid			<b>27,200.00</b>

**Cutting Instructions:**

Contract Available for Inspection

- 1) Clearcut area: cut all living trees greater than 1 inch in diameter except for yellow birch, oak, butternut, spruce, tamarack, pine, cedar, cherry, hemlock, balsam fir, apple and hawthorn. Do not cut non-merchantable trees in low wet areas and drainages. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized.
- 2) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations.
- 3) Any roadwork will require prior approval from the Lincoln County Forestry Department and must follow BMP guidelines. Contractor is responsible for installing broad based dips, water bars and/or using other soil stabilizing techniques where appropriate.
- 4) Ingress and egress to this sale is the responsibility of the contractor.
- 5) Gates/Berms removed or damaged by the contractor must be restored to original or better condition when the sale becomes inactive and upon sale completion.
- 6) Mixed hardwood pulp weight estimate is approximately: 24% ash, 3% white birch, & 7% basswood. Mixed hardwood pulp weight estimate includes approximately 3 MBF of red maple logs.

The Aware-Wolf

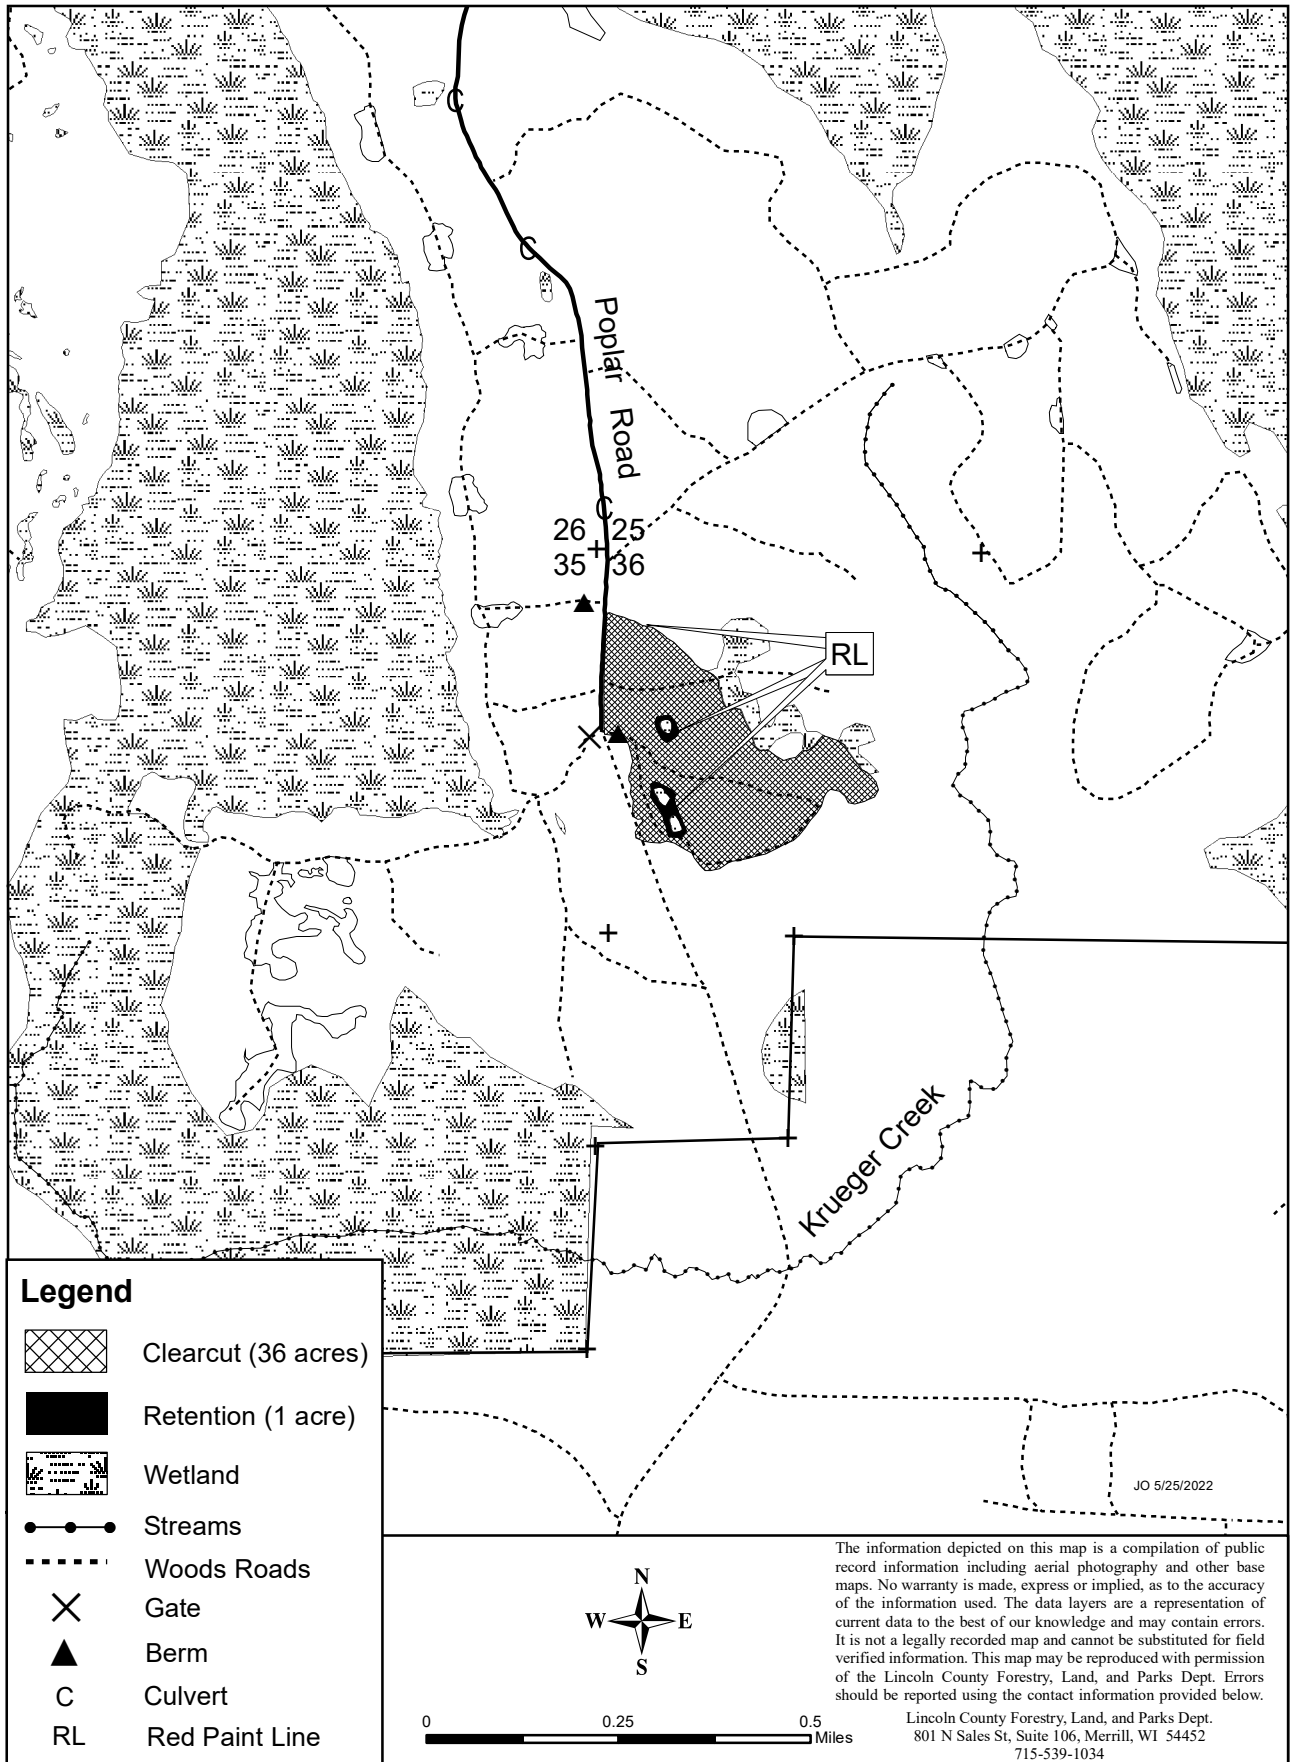

T025-22


**Wilson Forestry, LLC**114701 Township Road  
Athens, WI 54411Township: **Harding(N)**Advertised species, products and value for sale tract#: **T026-22-1**Contract Date: **11/14/22****NW¼, N½ SW¼, NW¼ SE¼ S15-T33N-R5E; NE¼ NE¼ S16-T33N-R5E**Approximate cutting area: **108** acres

Product Species	Estimated Unit Volume	Approved Bid Per Unit	Estimated Value
20-TA Aspen Pulp	Tons 2,850.00	15.00	42,750.00
20-TMX Mixed Hardwood Pulp	Tons 1,100.00	9.00	9,900.00
20-TBA Basswood Pulp	Tons 30.00	2.00	60.00
10-MX Mixed Hardwood Sawlogs	MBF 20.00	200.00	4,000.00
10-BA Basswood Sawlogs	MBF 1.00	200.00	200.00
10-MH Hard Maple Sawlogs	MBF 7.00	275.00	1,925.00
Total estimated value of accepted bid			<b>58,835.00</b>

**Cutting Instructions:****Contract Available for Inspection**

- 1) Clearcut area: cut all living trees greater than 1 inch in diameter except for yellow birch, oak, butternut, spruce, tamarack, pine, cedar, cherry, hemlock, balsam fir, apple, and hawthorn. Do not cut non-merchantable trees in low wet areas and drainages. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized.
- 2) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations.
- 3) Any roadwork will require prior approval from the Lincoln County Forestry Department and must follow BMP guidelines. Contractor is responsible for installing broad based dips, water bars and/or using other soil stabilizing techniques where appropriate.
- 4) Ingress and egress to this sale is the responsibility of the contractor.
- 5) Portions of this sale are wet and will require frozen ground/snow covered logging conditions.
- 6) Gates/Berms removed or damaged by the contractor must be restored to original or better condition when the sale becomes inactive and upon sale completion.
- 7) Mixed hardwood pulp weight estimate is approximately: 4% ash and 6% white birch. Mixed hardwood log estimate includes approximately 4 MBF of black ash logs.

The Fell Omen

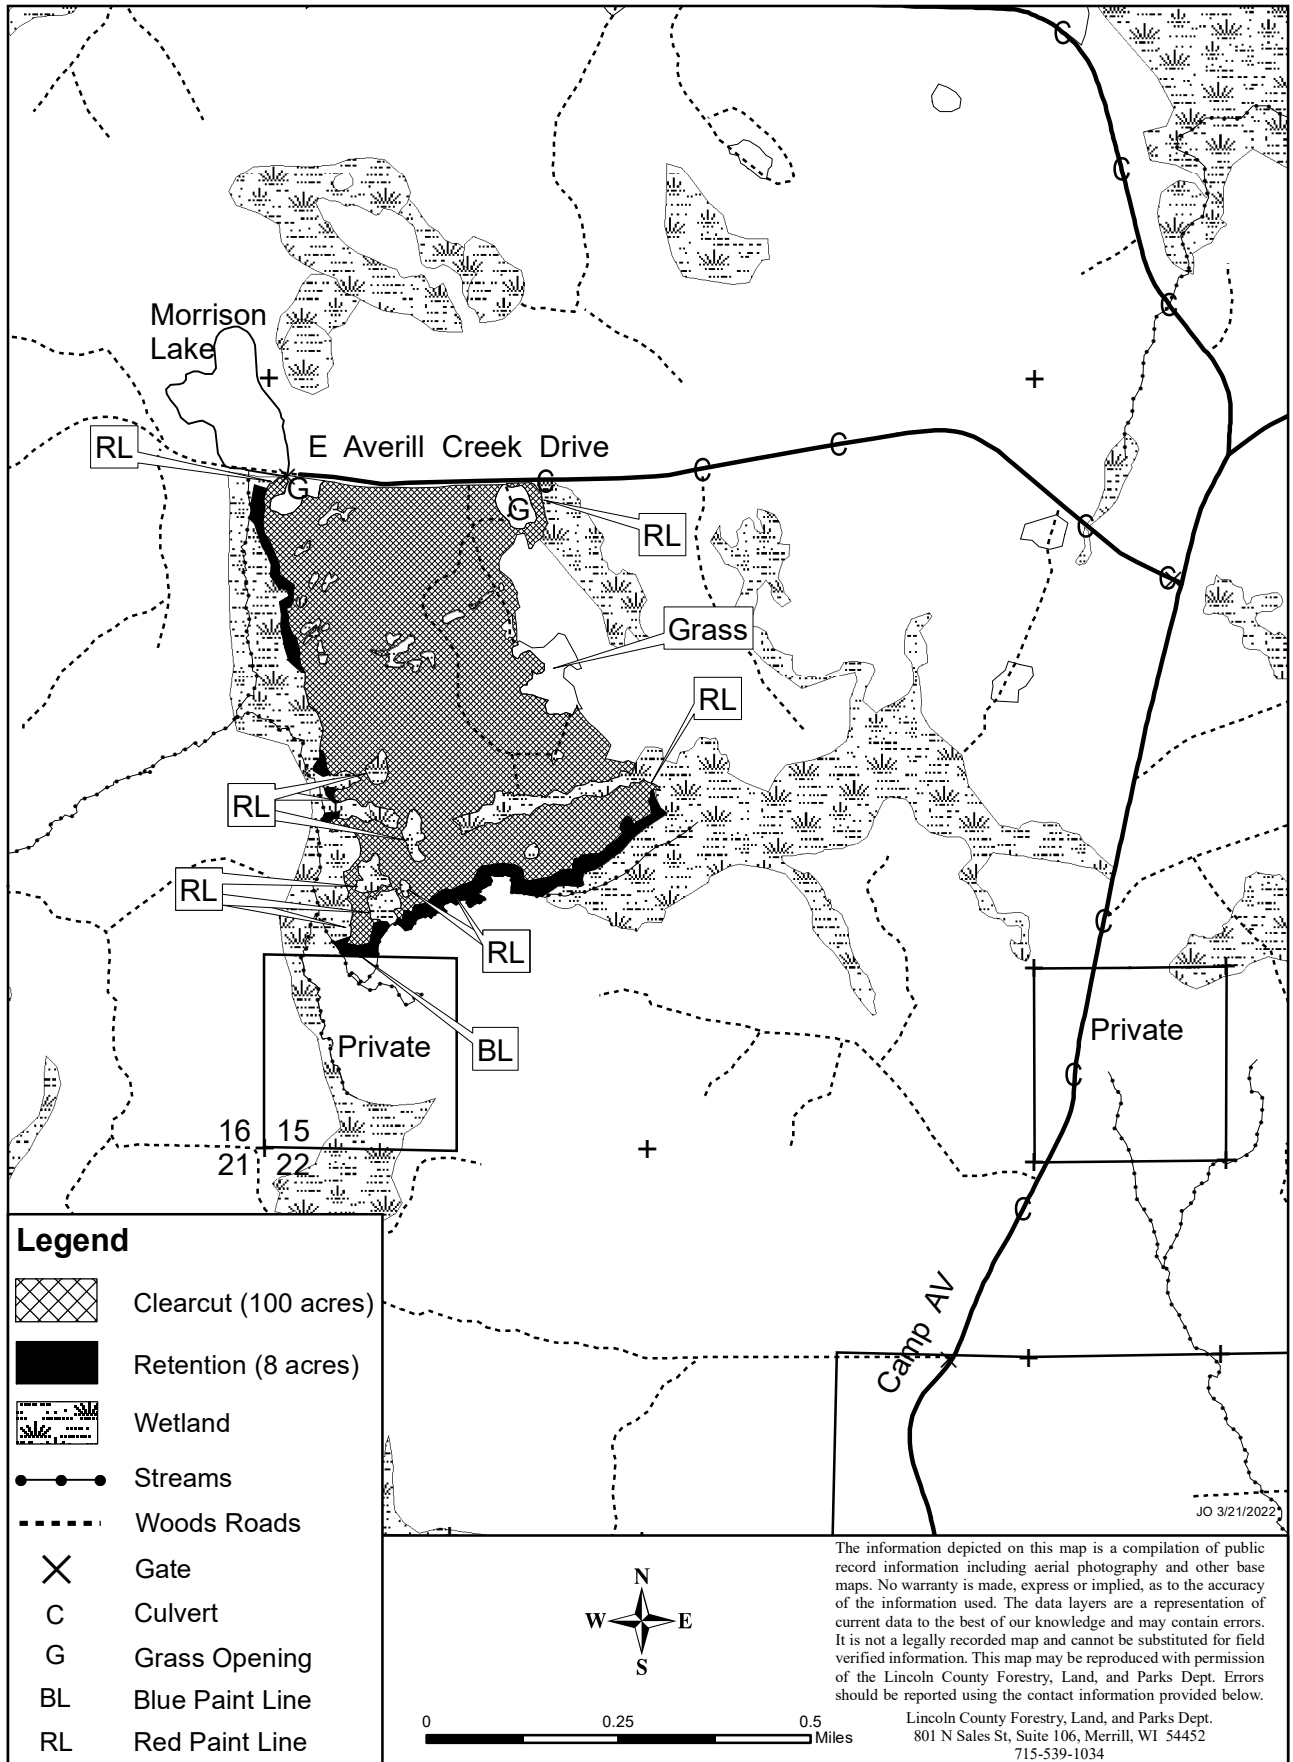

T026-22

**Futurewood Corporation**

9676 N. Kruger Road  
 Hayward, WI 54843  
 Township: **Wilson**

Advertised species, products and value for sale tract#: **T028-22-1**

Contract Date: **11/14/22**


**W $\frac{1}{2}$  SE $\frac{1}{4}$ , SE $\frac{1}{4}$  SE $\frac{1}{4}$  S7-T35N-R5E**

Approximate cutting area: <b>26</b> acres			Estimated	Approved Bid	Estimated
Product Species			Unit Volume	Per Unit	Value
20-TA	Aspen Pulp	Tons	1,300.00	23.77	30,901.00
20-TMX	Mixed Hardwood Pulp	Tons	15.00	11.12	166.80
20-TF	Fir Pulp	Tons	20.00	5.07	101.40
20-TPJ	Jack Pine Pulp	Tons	80.00	16.13	1,290.40
			Total estimated value of accepted bid		<b>32,459.60</b>

**Cutting Instructions:****Contract Available for Inspection**

- 1) Clearcut area: cut all living trees greater than 1 inch in diameter except for yellow birch, oak, butternut, spruce, tamarack, white pine, red pine, cedar, cherry, hemlock, apple, and hawthorn. Do not cut non-merchantable trees in low wet areas and drainages. Pockets of non-merchantable fir that will not impede aspen regeneration may be left uncut with prior approval from the Lincoln County Forestry Department. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized.
- 2) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations.
- 3) Any roadwork will require prior approval from the Lincoln County Forestry Department and must follow BMP guidelines. Contractor is responsible for installing broad based dips, water bars and/or using other soil stabilizing techniques where appropriate.
- 4) Ingress and egress to this sale is the responsibility of the contractor.
- 5) Due to soil limitations, no biomass harvesting is allowed.
- 6) The sale is adjacent to red pine plantations. Lincoln County's HRD (Heterobasidion root disease) Policy must be followed during the harvest. All jack pine stumps must be treated.
- 7) Mixed hardwood pulp weight estimate is approximately: 50% white birch.

Jester

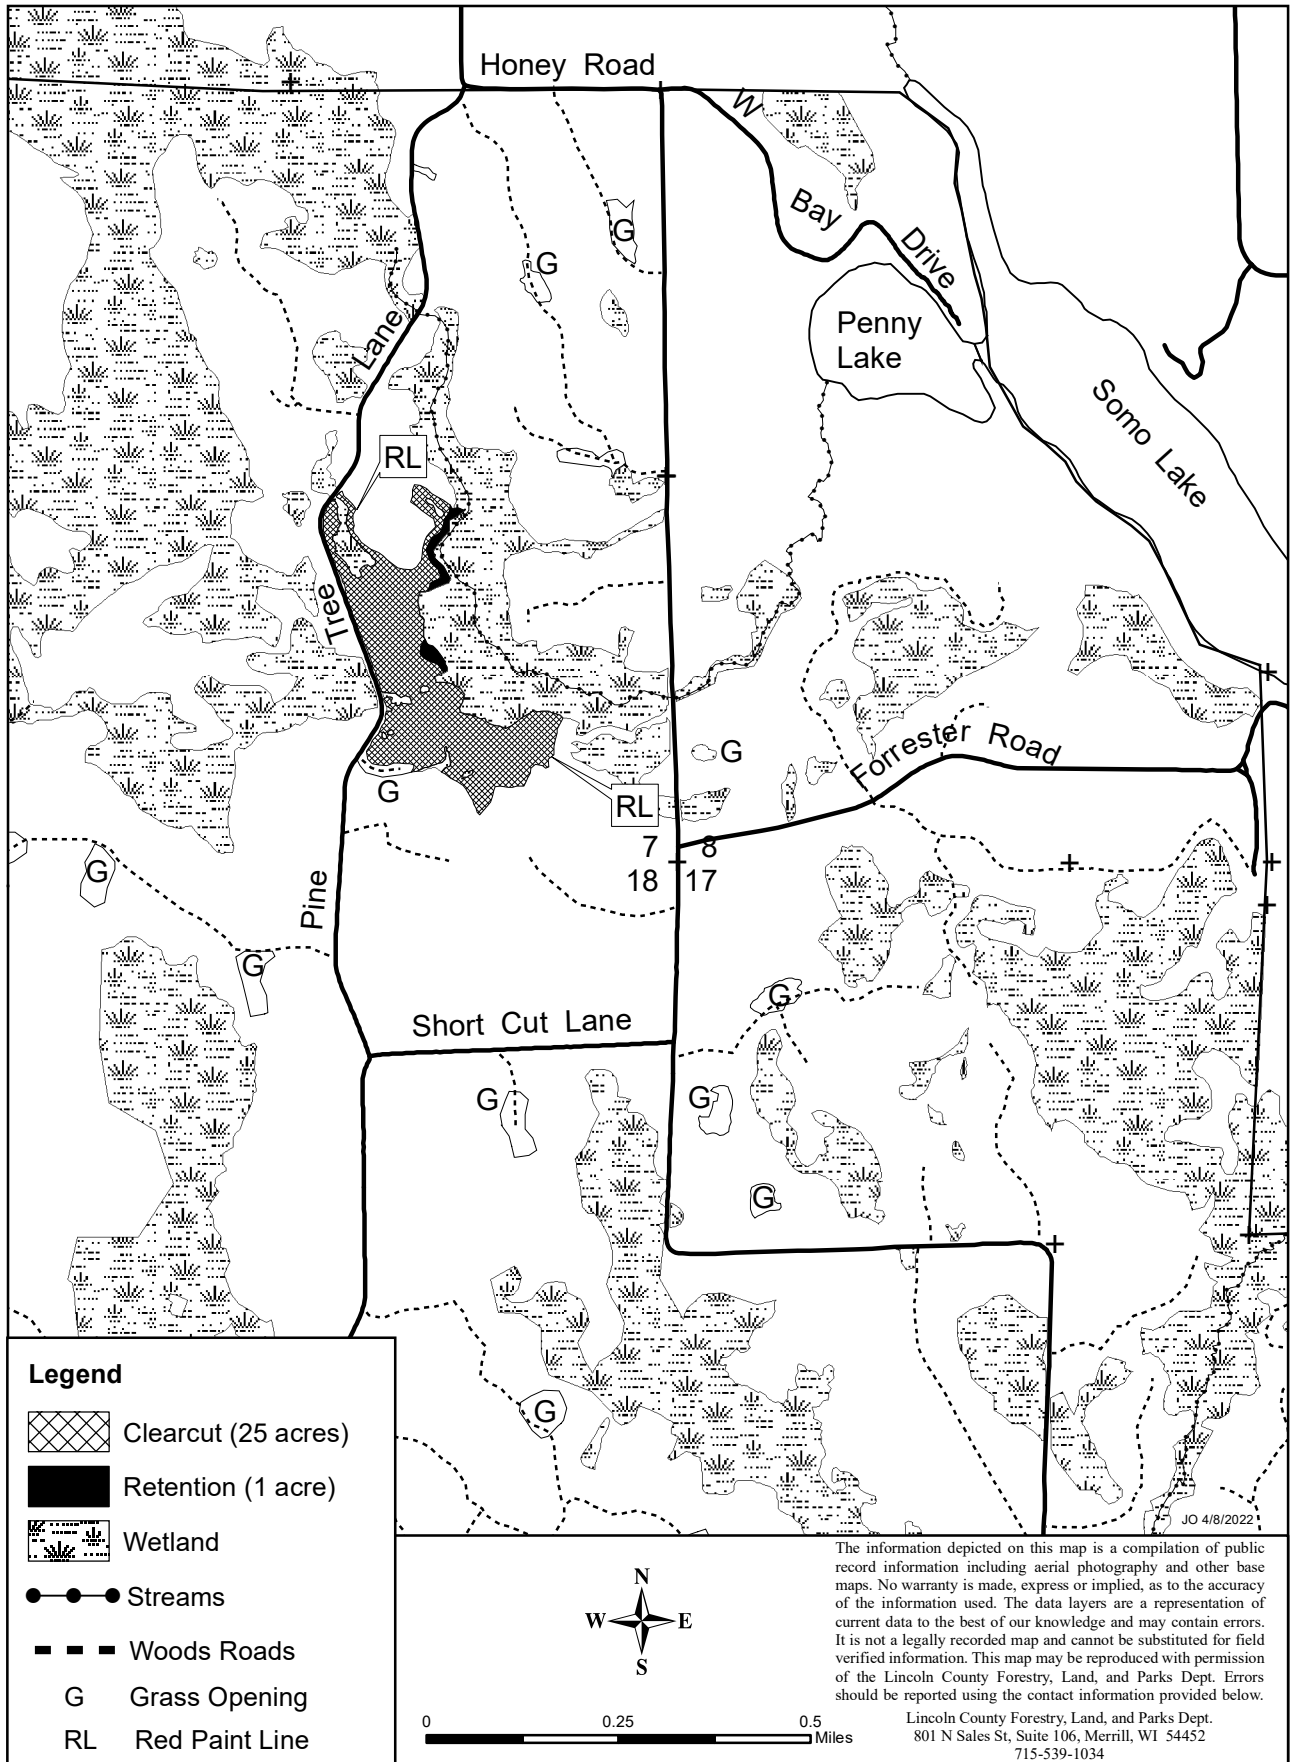

T028-22



**Flannel Fleet Logging, LLC**

W4155 Center Ave

Medford, WI 54451


Township: **Harding(N)**Advertised species, products and value for sale tract#: **T029-22-1**Contract Date: **11/14/22****W<sup>1</sup>/<sub>2</sub> NW<sup>1</sup>/<sub>4</sub>, SE<sup>1</sup>/<sub>4</sub> NW<sup>1</sup>/<sub>4</sub>, N<sup>1</sup>/<sub>2</sub> SW<sup>1</sup>/<sub>4</sub> S2-T33N-R5E**Approximate cutting area: **37** acres

Product Species	Estimated Unit Volume	Approved Bid Per Unit	Estimated Value
20-TA Aspen Pulp	Tons 25.00	12.10	302.50
20-TMX Mixed Hardwood Pulp	Tons 1,750.00	10.27	17,972.50
20-TBA Basswood Pulp	Tons 55.00	4.06	223.30
10-MX Mixed Hardwood Sawlogs	MBF 30.00	215.00	6,450.00
10-MH Hard Maple Sawlogs	MBF 10.00	428.00	4,280.00
Total estimated value of accepted bid			<b>29,228.30</b>

**Cutting Instructions:****Contract Available for Inspection**

- 1) Clearcut area: cut all living trees greater than 1 inch in diameter except for yellow birch, oak, butternut, spruce, tamarack, pine, cedar, cherry, hemlock, balsam fir, apple, hawthorn, and yellow paint marked trees. Do not cut non-merchantable trees in low wet areas and drainages. Selection harvest area: cut all ironwood and orange paint marked trees. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized.
- 2) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations.
- 3) Any roadwork will require prior approval from the Lincoln County Forestry Department and must follow BMP guidelines. Contractor is responsible for installing broad based dips, water bars and/or using other soil stabilizing techniques where appropriate.
- 4) Ingress and egress to this sale is the responsibility of the contractor.
- 5) Permission must be granted by the Forestry Department to use the snowmobile trail from December 1 to March 31. Ample snow cover must be maintained to allow safe snowmobile operation.
- 6) Selection Harvest area: In order to protect advanced regeneration whole tree skidding with tops attached will be subject to field approval.
- 7) Special care must be taken to limit damage to advanced regeneration.
- 8) Mixed hardwood pulp weight estimate is approximately: 21% white birch. Basswood pulp weight estimate contains all sawlog volume. Mixed hardwood sawlog volume is approximately: 65% red maple: 20% white birch; and, 14% white ash.

Swampy Lobster

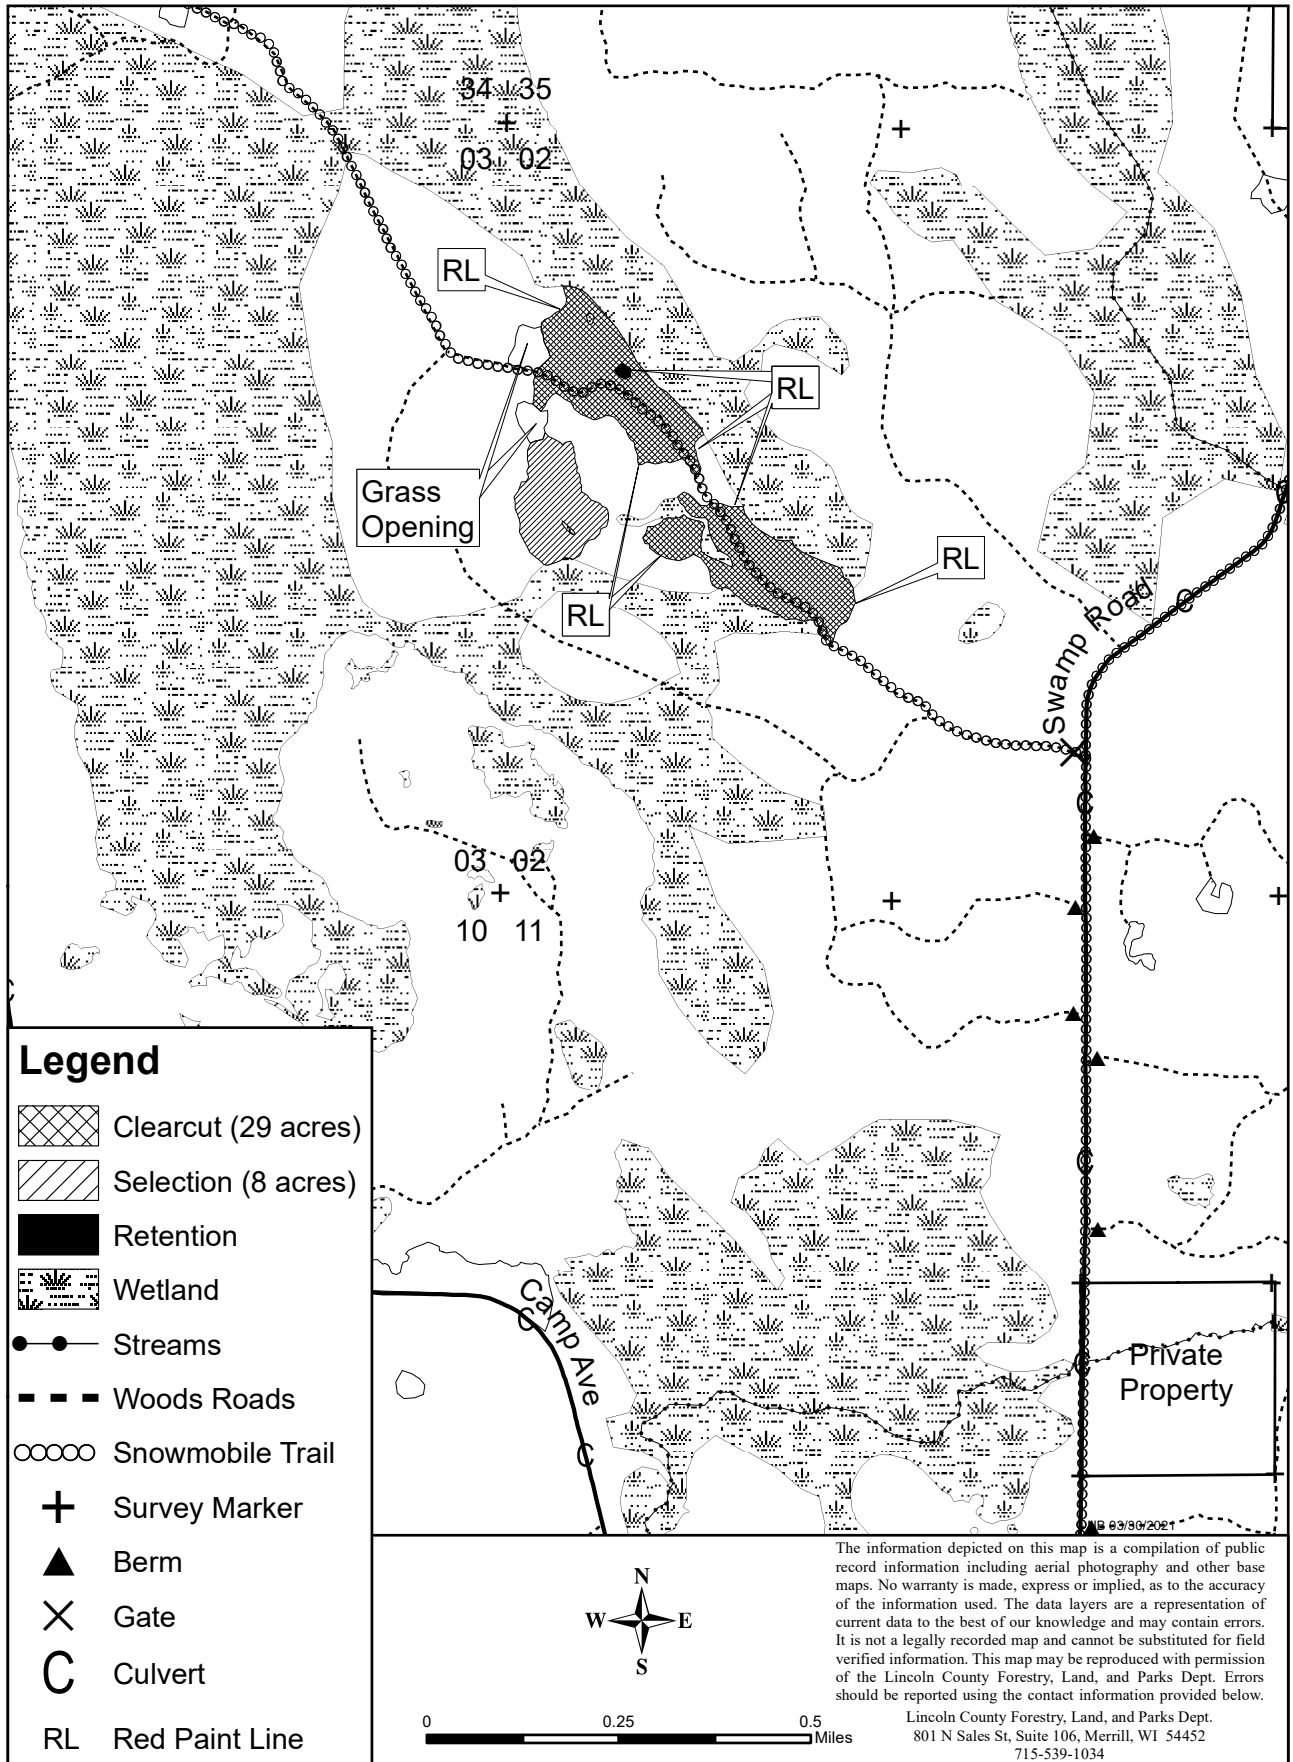

T029-22