


# BLACK RIVER STATE FOREST TIMBER SALE MAP

T22N R2W Sec 20  
TRACT 10-23 End of Road

Sale size: 140 acres  
Map Scale: 1" = 1/4 mile

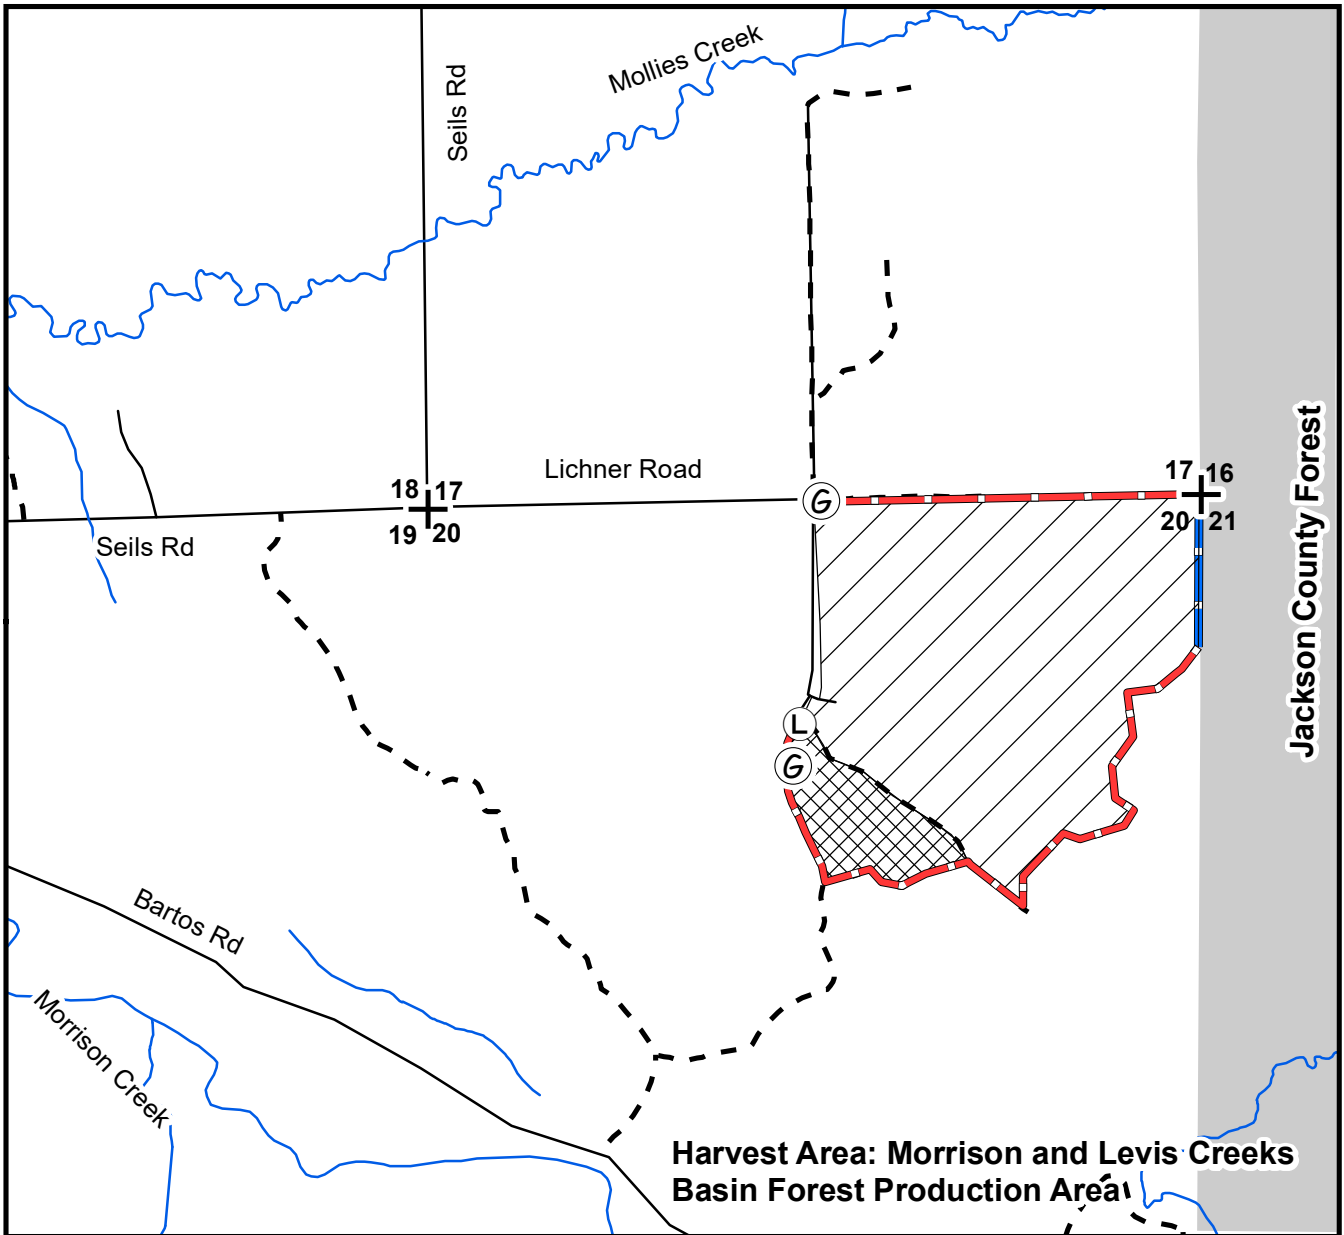

**Harvest Area: Morrison and Levis Creeks  
Basin Forest Production Area**

**All units require stump treatment for HRD unless cut between December 1 and March 31!**  
Some areas of the sale (approx. 1/3 to 1/2) are located on low ground and will require very dry or frozen conditions and/or extra care and slash matting by the equipment operators.

Seed Tree Area, 124 Acres. Cut all trees  $\geq 5$ " dbh except red pine and those marked with an "X".  
Cut all red pine marked in orange. Also, leave 6-10 large-crowned white pine  $\geq 9$ " dbh per acre in areas without red pine.

Marked Area, 16 Acres. Cut all trees  $\geq 5$ " dbh except red pine, white pine, and those marked with an "X".  
Cut all red and white pines marked with orange.

Jackson County Forest

- |                  |           |             |         |
|------------------|-----------|-------------|---------|
| Proposed Landing | Blue Line | Woods Roads | Streams |
| Section Corners  | Red Line  | Town Roads  | Gate    |



Mapped and Cruised  
by Matt Raabe  
715-896-0536

This map is not a survey of the actual boundary of any property the map depicts

## BRSF Tract 10-23

### End of Road Sale

T22N-R2W Sec 20

Sale size: 140 Acres  
Contract Period: 3 years

### Estimated Volume

<u>Species</u>	<u>MBF Included in Volume</u>	<u>Cord Equivalent</u>	<u>Tons</u>
Jack Pine	0	(1600)	3400
White Pine	186	(1150)	2400
Mixed Hardwoods*	0	(170)	400
Red Pine	3	(60)	140
Oak	5	(60)	160

\*Includes approx. 250 tons of red maple, 125 tons of aspen, and 25 tons of white birch  
Biomass harvesting is not allowed

### Scaled Sale

**Minimum Bid Value = \$ 41,856.00**

### Special Operating Requirements and Slash Disposal:

1. **Portions of the sale (approx. 30-50%) are on low ground and will require very dry or frozen conditions and/or extra care and slash matting by the equipment operators.**
2. **All pine products cut between March 1st and August 30 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed before March 15<sup>th</sup>.**
3. **This sale is located within the 25-mile Heterobasidial Root Disease (HRD) area, and requires stump treatment unless harvested between December 1 and March 31. Treatment must be performed by a Certified Pesticide Applicator. Treatment involves chemically treating all fresh-cut stumps of pines of merchantable size by applying either CELLU-TREAT (disodium octaborate tetrahydrate) or Rotstop C (biological fungicide). Treatment shall be made as soon as possible and no later than one day after harvest and a dye product shall be added to liquid solutions for inspection purposes. The cost of this application can vary based on application method and harvest conditions, but should be considered when submitting bids on these timber sales.**
4. The sale boundaries are red paint lines, blue paint lines, and Lichner Road. Do not fell trees across paint lines and do not cut painted boundary trees.
5. Slash must be evenly lopped/scattered within the sale boundary and shall be deposited a minimum of 10 feet from the mowed right-of-way of any highway, town road, or recreational trail. Slash within 50 feet of all town roads and recreational trails must lie within 2 feet of the ground. Do not bury seedlings or saplings with slash.

### General Requirements:

1. All designated tree species must be cut and forwarded concurrently with the sale.
2. All stumps shall be no higher than the stump diameter, or 10 inches, whichever is less.
3. Do not cut or knock down any dead or hollow trees. These are important wildlife habitat. Any that must be cut shall be left in big pieces on the forest floor.
4. Utilization: cut and use all designated trees with one or more 100" sticks to a 4" top diameter.
5. Notify the DNR forester (Matt Raabe 715-896-0536) before you start the job, and each time you pull out or return to the job.
6. Any new roads and all landings must be approved by a DNR forester before operations begin.
7. Any berms removed during harvesting operations must be put back to the satisfaction of the DNR Forester.
8. Any trees cut or pushed over for new roads or landings must be utilized or cleaned up to the DNR Forester's satisfaction.
9. Contact the Town of Komensky at 715-299-003 prior to beginning logging operations. A permit is required for hauling heavy loads and equipment on all town roads year-round. Any new road approaches along town roads require approval by the Town Patrolman.
10. **Wisconsin's Best Management Practices for Invasive Species applies – contractor must clean equipment before entering and leaving the sale area! This involves brushing away all dirt and cleaning air intakes of debris.**